

# 目 录

About This Manual

Product Description

Operation Instruction

    Login Interface

    Remote Monitoring

        Account Registration

        Login via Account

        WLAN Configuration

        Home

            Creating Plant

            Sharing and Deleting Plant

            Configuration

            Viewing Plant Information

            Device Initialization

            Cleaning Robot

        Viewing Fault Information

        More

            Firmware Download

            Smart IV Curve Diagnosis

            Live Data

WLAN Login (Near End)

    Login

    Function Overview

    Home

    Chart

    More

Bluetooth Login (Near End)

    Login

    Function Overview

    Home

    Run Information

    Records

[More](#)

[Appendix](#)

[Manual Description](#)

[Contact Information](#)

# About This Manual

## About This Manual

---

### Target Group

This manual is intended for distributor/installer, end user, and O&M personnel of PV residential system, energy storage system, commercial system, and microgrid.

### Symbols

NOTE indicates additional information, emphasized contents or tips to help you solve problems or save time.

### Introduction

This manual mainly describes how to install, configure, and operate the iSolarCloud App.

Screenshots in this manual are based on the iSolarCloud App V2.1.6.20210629. All icons and data displayed are for reference only, and the actual screens may differ.

Operation method is described by using the iOS system as an example. The method for the Android system is the same, except that the screens are somewhat different. The actual screens prevail.

# Product Description

## Product Description


---

### App Introduction

The iSolarCloud App is a mobile application used for managing PV plants. The App can provide power plant operation analysis and mobile intelligent O&M services. It is designed with functions such as display of plant operation data, rapid plant access, remote parameter setting, quick fault positioning and notification, and power generation and revenue analysis, achieving convenient and efficient end-to-end operation and maintenance.

### Networking Modes

Users can monitor plant device information either remotely or locally via the App.

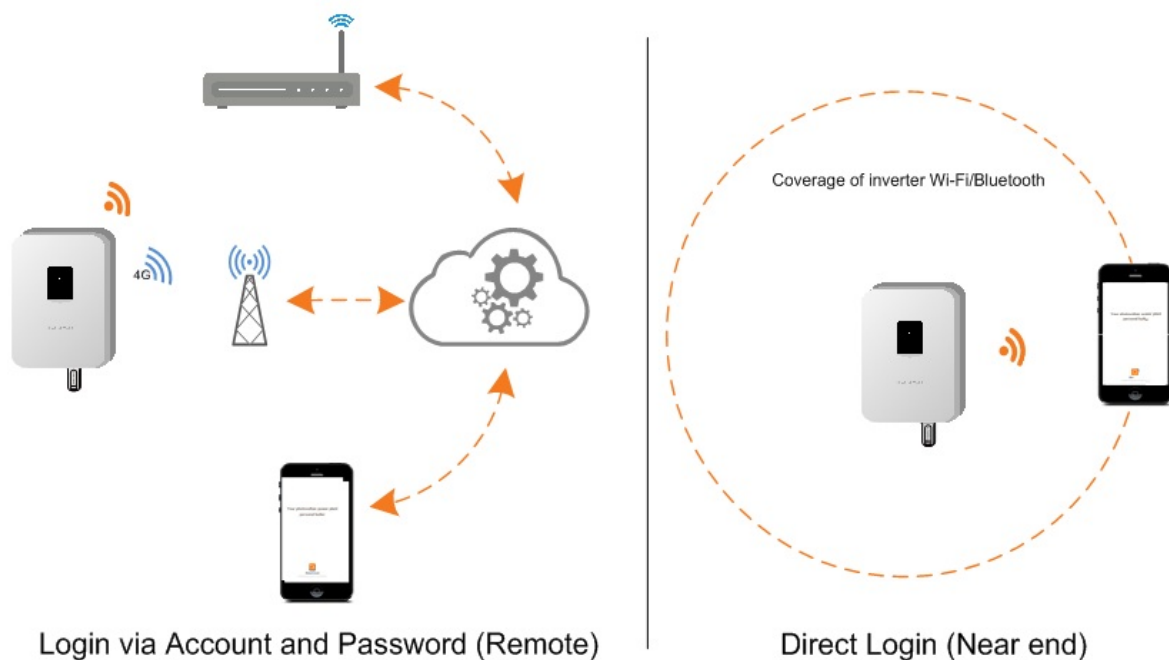

#### Login via Account and Password (Remote)

Establish communication connection between the communication module and home router or base station, so that the inverter can communicate with cloud server. The users can view inverter data or send instructions to control the inverter through the App.

#### Direct Login (Near end)

Establish communication connection between the mobile phone and WiFi wireless communication module or Bluetooth module integrated into the inverter, achieving near-end maintenance on the inverter. The users can view inverter information and set parameters through the APP.

Bluetooth login is only applicable to SUNGROW inverters with built-in Bluetooth module. For whether the inverter is equipped with the Bluetooth module, consult the distributor/installer.

## App Installation

This section introduces how to download and install the iSolarCloud App.

### Prerequisites

- Mobile phone operating system: Android 5.0 or later; iOS 11.0 or later.
- The mobile phone can be normally connected to WLAN or 2G/3G/4G network.
- The mobile phone has sufficient memory space for App installation.
- The mobile phone has sufficient battery power.

### Procedure

1.Download the iSolarCloud App from Myapp (Android mainland China users), Google Play (Android users outside mainland China), or APP Store (iOS users). Alternatively, scan the following QR code and follow the instructions on the screen to download the App.



2.Select the downloaded installation package and follow the instructions on the screen to complete the installation. After installation, the iSolarCloud icon will be displayed on the mobile phone screen.



iSolarCloud

# Operation Instruction

## Operation Instruction

---

Images in this manual are for reference only, and the actual screens may differ.


# Login Interface

## Login Interface

---

### Server Setting

When you first access the App, a server selection box will pop up. Tap “Confirm” to connect the current address displayed on the screen, or tap “Switch” to select another one.

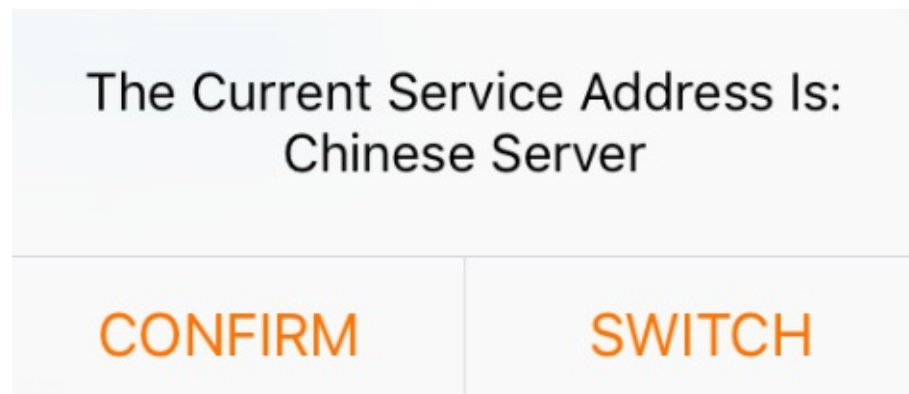


It is recommended that mainland China users select “Chinese server”, European and African users select “European server”, Australian users select “Australian server”, and users in the other regions select “International server”.


The service address accessed by the App must be the same as that accessed by the Logger, and c

Users can switch the service address according to demands.

### Procedure

1. Tap the icon  in the upper right corner of the login screen.
2. Tap “Select server”.
3. Select the corresponding service address.

### Help

Tap the button  in the upper right corner of the login screen to view the corresponding user manual, FAQs, terms of service, etc.



# Remote Monitoring

## Remote Monitoring

---

This section describes how to register an account, log into the iSolarCloud App via the account and password, view plant information and set plant parameters.

# Account Registration

## Account Registration

---

### Introduction

The account distinguishes two user groups end user and distributor/installer.

The end user can view plant information, create plants, set parameters, share plants, etc.

The distributor/installer can help the end user to create plants, manage, install, or maintain plants, and manage users and organizations.

### Procedure

1. Tap “Register” to enter the registration screen.

2. Select “End user” or “Distributor/installer” to enter the corresponding screen.

Select "Chinese server", only distributor/installer is allowed to register.

Select "International server", "European server", or "Australian server", end user and distributor/installer are allowed to register.

3. Fill in the registration information, including select server, email or phone number, verification code, password, confirm password, country (region), and time zone. The distributor/installer further has the permission to fill in the company name and the code of upper level distributor/installer.

Select "Chinese server", phone number is allowed to register.

Select "International server", "European server", or "Australian server", email is allowed to register.

4. Tick “Accept privacy protocol” and tap “Register”, to finish the registration operation.

- Mainland China users select “Chinese server”, European users and African users select “European server”, Australian users select “Australian server”, and the other users select “International server”.
- The code of upper level distributor/installer can be obtained from the upper level distributor/installer. Only when your organization belongs to the upper level distributor/installer organization, can you fill in the corresponding code.
- When the country (region) is set to Brazil or Mexico, the field code of upper level distributor/installer must be filled in.



# Login via Account

## Login via Account

---

This section describes how to log into the iSolarCloud App.

### Prerequisites

- The iSolarCloud App has been installed.
- You have already registered an account or have got the account and password from the distributor/installer or SUNGROW.

### Procedure

1. Enter the account and password on the login screen.
2. Tap "Login" to enter the home screen.

SUNGROW



Plant status ▾

Today yield: --

**RESUME COMMISSIONING**

A1806163081

...

Equivalent hours: --

Today yield: 33.7 kWh



A20190119

...

Device with problem: ● 2

Equivalent hours: 0 Hour

Today yield: 0 kWh



A1812016638

...

Equivalent hours: 0 Hour

Today yield: 0 kWh



A1908050017

...

Equivalent hours: --

Today yield: --

**RESUME COMMISSIONING**

Home



Fault



More

## Description of home screen

| Navigation   bar | Description   |
|------------------|---|
| Home             | The plant list shows plants created and plants shared to others. Users can create plants, share plants, view plant information and set plant parameters on this screen. |
| Fault            | Tap “Fault” to view fault types and detailed fault information.   |
| More             | Tap “More” to perform operations such as WLAN configuration, local access, and personal setting.  |

# WLAN Configuration

## WLAN Configuration

---

The WiFi module can be connected to the home network, so that the inverter can communicate with the iSolarCloud server. Users can view inverter data or send instructions to control the inverter through the App.

### Prerequisites


- You have already got the account and password from the distributor/installer or SUNGROW.
- The inverter has been connected with the WiFi wireless communication module researched by SUNGROW.
- You have got the WLAN name and password of the home network.

### Procedure

1. Enter the account and password on the login screen and tap "Login", to enter the App home screen.
2. Tap "More" on the navigation bar to enter the corresponding setting screen.
3. Tap "WLAN config" to enter the corresponding screen.
4. Connect to the inverter WLAN. For Android system, tap "Settings" to automatically enter the wireless network screen. For iOS system, manually switch to "Settings-WLAN". Select the inverter WLAN named in the form of "SG-WiFi module serial number", where the serial number can be found on the side of the WiFi module.



5. Prompt information will pop up once you successfully connect to the inverter WLAN.

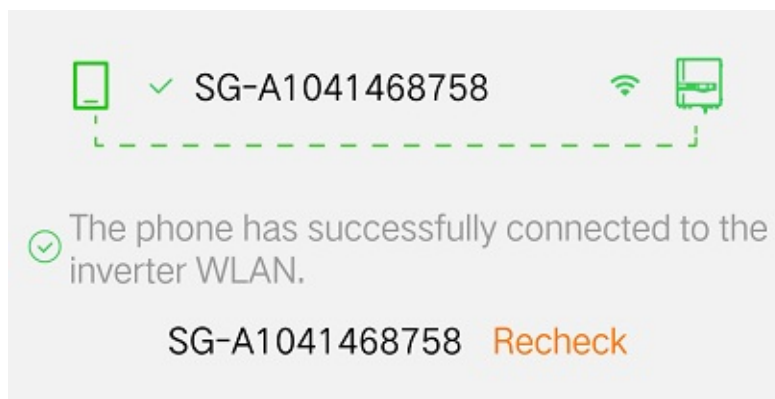

6. Tap “Next” at the lower part of the screen to connect the inverter to the home network. Select the home network WLAN and enter the password. The symbol “√” indicates a successful connection to the home network WLAN.





Please select the home network connection for the inverter.



SG-A20190119



OPPO R15x



SG-A190206I864



MERCURY\_NO1



MW\_TEST



SG-CG666888



sungrow-cloud



qiang的 iPhone



sungrow



7. Tap “Next”, and information indicating a successful connection to the home network will pop up. Tap “Complete” to finish the WLAN configuration.




sungrow



**The inverter has successfully connected to the home network.**

Connect your mobile device back to the Internet, then switch to the iSolarCloud APP to continue.

**Proceed to Set>>**

Alternatively, you can tap the icon  in the upper right corner on the login screen and select WLAN

configuration to configure the WLAN.

Disconnect the mobile phone from the inverter WLAN to ensure the phone can normally access the Internet. Then

Home

**Home**

---

# Creating Plant

## Creating Plant

---

This section describes the procedure of creating plants through the App.

The plant creation screen may slightly vary with plant type, inverter type, and communication device. For details, refer to the actual screen.

### Prerequisites

- You have already got the account and password from the distributor/installer or SUNGROW.
- The inverter is normally connected to the communication device researched by SUNGROW.

### Introduction


The end user assigns the plant to the distributor/installer for management and gets the distributor/installer code from the distributor/installer.

The distributor/installer who creates a plant for the end user needs to get the end user's e-mail address.

In creating a plant, the e-mail address is required, and each e-mail address can be registered only once.

### Procedure

The operation steps for the communication device to be "WLAN" are as follows.

1. Enter the account and password on the login screen and tap "Login", to enter the App home screen.
2. If there is no plant, tap "Create power plant"; and if there are plants, tap the icon  in the upper right corner to enter the creating screen.
3. Select plant type. If the plant is a residential plant, tap "RESIDENTIAL"; and if the plant is a commercial plant, tap "COMMERCIAL".
4. Select inverter type. Tap "PV" when all inverters of the plant are PV inverter. Tap "HYBRID" when the plant has at least one hybrid inverter.
5. Add an inverter. You can scan the QR code on the communication device or manually enter the serial number of the communication device. Tap "Next" after the QR code is identified or the serial number entered is correct and then tap "CONFIRM". The inverter is thus added successfully.
6. Select communication device is "WLAN".


Skip to step 7 when scanning the QR code on the communication device adds an inverter.

7. Connect the inverter. Switch to “Settings-WLAN”. Select the inverter WLAN named in the form of “SG-WiFi module serial number”, where the serial number can be found on the side of the WiFi module.

8. Return to the App, and the screen displays successful connection to the inverter WLAN. Tap “NEXT”.

9. Select local network. Select local WLAN network and enter the WLAN password. The symbol “√” indicates successful connection to the local Wi-Fi network. Tap “NEXT”, and the screen displays prompt information of successful connection to the local network. Tap “NEXT”.

10. If there is no latest equipment upgrade package, skip to step 16. If a latest equipment upgrade package is available, the following prompt window pops up.

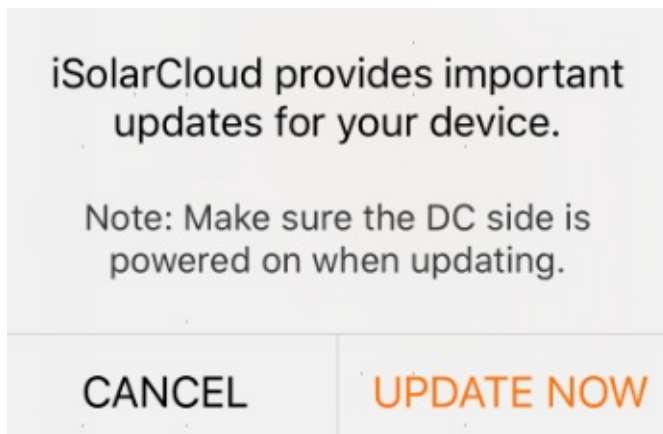

11. Tap “UPDATE NOW” to prompt the phone to reconnect to the Internet. Disconnect the mobile phone from the inverter WLAN to ensure the phone can normally access the Internet. Then connect the mobile phone to the local network, or enable the “Mobile data”.

12. Return to the App, and the screen displays successful connection to the Internet. Tap “NEXT” to download the latest upgrade package.

13. After download, Tap “NEXT” to prompt the phone to reconnect to the inverter WLAN.

14. Return to the App, and the screen displays successful connection to the inverter. Tap “NEXT” to update device.

15. After successful upgrade, the screen will show the version numbers before and after the upgrade as well as the upgrade time. Tap “COMPLETE”.

If the communication equipment is upgraded, after successful upgrade, check and confirm that the phone is connected to the Internet.

16. If initialization setting is not performed on the inverter, you will set the initialization protection parameters according to actual needs. After finishing the setting, tap “NEXT”.

The parameter "Country (region)" must be set to the country (region) where the inverter is installed at. Other


17.The screen displays that the inverter is successfully configured. Tap "NEXT".

18.Reconnect to the Internet. Disconnect the mobile phone from the inverter WLAN to ensure the phone can normally access the Internet. Then connect the mobile phone to the local network, or enable the "Mobile data".

19.Return to the App, and the screen displays successful connection to the Internet. Tap "NEXT".

20.The screen displays the inverter device added in step 5. Tap "Add more" and repeat step 5 to step 19, to add more inverters. Tap "NEXT".

21.Configure the plant. Tap "NEXT" to fill in the plant information.

| Parameter          | Description  | End&nbsp;user | Distributor/installer |
|--------------------|--|---------------|-----------------------|
| Plant name*        | Name of the plant,device serial number (default)   | √             | √                     |
| Plant time zone*   | Time zone of the plant   | √             | √                     |
| Country (region)*  | Country (region) where the plant is located at   | √             | √                     |
| Plant address*     | Location of the plant, which can be added in two manners.<br>Manual input: enter the plant location manually.<br>Automatic obtaining: tap the icon  to automatically obtain current location or search for plant location, and tap "Confirm". | √             | √                     |
| Postal code        | Zip code of the place where the plant is located at  | √             | √                     |
| Battery type**     | Type of the battery including lithium battery and lead-acid battery  | √             | √                     |
| Battery capacity** | Capacity of the battery  | √             | √                     |
| Grid-connection    | Time at which the plant starts   | √             | √                     |

|      |  |  |  |
|------|--|--|--|
| date |  |  |  |
|------|--|--|--|

Note: \* Indicates fields that must be filled in.

\*\* is only applicable to energy storage inverters.

22.(Optionally) Configure tariff. Tap "NEXT" to fill in the tariff information. The electricity price can be set to a specific value or Time-of-Use tariff.

Feed-in price: the price of selling power to the grid.

Consumption tariff: the price of purchasing power from the grid.

- Set electricity price

a.Select a price unit.

b.Enter the feed-in price and consumption tariff according to actual conditions, and tap "NEXT".

- Set Time-of-Use tariff

a.Select a price unit.

b.Turn on the feed-in price and consumption tariff switches as you need.

c.Tap "ADD TIME SEGMENT", enter unit price, set start time and end time, and click "CONFIRM".

d.Optionally, repeat the foregoing step to set Time-of-Use tariffs for multiple time segments within a day.

e.Tap "Other time" and enter unit price for other time segment.

f.Tap "NEXT".

Tap the time segment to enter the "EDIT TARIFF" screen, on which you can modify and delete Time-of-Use tariff.

Time-of-Use tariff should cover 24 hours and be different in each time segment.

23.Distributor/installer creates new a plant and fills in the end user's e-mail address. The first time you fill in the end user's e-mail address, the system will create an account for the end user and send a email to the end user. The Distributor/installer creates plants for the end user and can manage the plants by default.

If the plant type select "RESIDENTIAL", the end user's e-mail address is required. If the plant type select "

The end user creates a new plant and fills the distributor/installer code (optional). Fill in the distributor/installer code, so that the distributor/installer can view and manage the plant.

distributor/installer code, so that the distributor/installer can view and manage the plant.

The distributor/installer code must be filled in if the parameter "country (region)" is set to Brazil.

24. Tap "NEXT" to wait for the inverter to connect to the iSolarCloud.


25. After the inverter is connected to the iSolarCloud, tap "COMPLETE". Return to the App home screen on which information of the newly created plant will be displayed.

When the plant is created, or when you exit during the creation process, the "User Review" interface will pop up.

## Procedure

The operation steps for the communication device to be "Ethernet", "COM100/Logger1000" or "EyeM4" are as follows.

1. Enter the account and password on the login screen and tap "Login", to enter the App home screen.

2. If there is no plant, tap "Create power plant"; and if there are plants, tap the icon  in the upper right corner to enter the creating screen.

3. Select plant type. If the plant is a residential plant, tap "RESIDENTIAL"; and if the plant is a commercial plant, tap "COMMERCIAL".

4. Select inverter type. Tap "PV" when all inverters of the plant are PV inverter. Tap "HYBRID" when the plant has at least one hybrid inverter.

5. Add an inverter. You can scan the QR code on the communication device or manually enter the serial number of the communication device. Tap "Next" after the QR code is identified or the serial number entered is correct and then tap "CONFIRM". The inverter is thus added successfully.

6. Select communication device is "WLAN", "COM100/Logger1000" or "EyeM4".


Skip to step 7 when scanning the QR code on the communication device adds an inverter.

7. The screen displays the inverter device added in step 5. Tap "Add more" and repeat step 5 to step 19, to add more inverters. Tap "NEXT".

8. Configure the plant. Tap "NEXT" to fill in the plant information.

| Parameter   | Description                                       | End&nbsp;user | Distributor/installer |
|-------------|---|---------------|-----------------------|
| Plant name* | Name of the plant, device serial number (default) | √             | √                     |
| Plant time  | Time zone of the plant                            | √             | √                     |



|                      |  |   |   |
|----------------------|--|---|---|
| Country (region)*    | Country (region) where the plant is located at   | √ | √ |
| Plant address*       | Location of the plant, which can be added in two manners.<br>Manual input: enter the plant location manually.<br>Automatic obtaining: tap the  icon to automatically obtain current location or search for plant location, and tap “Confirm”. | √ | √ |
| Postal code          | Zip code of the place where the plant is located at  | √ | √ |
| Battery type**       | Type of the battery including lithium battery and lead-acid battery  | √ | √ |
| Battery capacity**   | Capacity of the battery  | √ | √ |
| Grid-connection date | Time at which the plant starts feed-in operation   | √ | √ |

Note: \* Indicates fields that must be filled in.

\*\* is only applicable to energy storage inverters.

9.(Optionally) Configure tariff. Tap “NEXT” to fill in the tariff information. The electricity price can be set to a specific value or Time-of-Use tariff.

Feed-in price: the price of selling power to the grid.

Consumption tariff: the price of purchasing power from the grid.

- Set electricity price

a.Select a price unit.

b.Enter the feed-in price and consumption tariff according to actual conditions, and tap “NEXT”.

- Set Time-of-Use tariff

a.Select a price unit.

b.Turn on the feed-in price and consumption tariff switches as you need.

b. Turn on the feed-in price and consumption tariff switches as you need.

c. Tap “ADD TIME SEGMENT”, enter unit price, set start time and end time, and click “CONFIRM”.

d. Optionally, repeat the foregoing step to set Time-of-Use tariffs for multiple time segments within a day.

e. Tap “Other time” and enter unit price for other time segment.

f. Tap “NEXT”.

Tap the time segment to enter the “EDIT TARIFF” screen, on which you can modify and delete Time-of-Use tariff.

Time-of-Use tariff should cover 24 hours and be different in each time segment.

10. Distributor/installer creates new a plant and fills in the end user’s e-mail address. The first time you fill in the end user’s e-mail address, the system will create an account for the end user and send a email to the end user. The Distributor/installer creates plants for the end user and can manage the plants by default.

If the plant type select "RESIDENTIAL", the end user's e-mail address is required. If the plant type select "


The end user creates a new plant and fills the distributor/installer code (optional). Fill in the distributor/installer code, so that the distributor/installer can view and manage the plant.

The distributor/installer code must be filled in if the parameter "country (region)" is set to Brazil.

11. Tap “NEXT” to wait for the inverter to connect to the iSolarCloud.

12. After the inverter is connected to the iSolarCloud, tap “COMPLETE”.

13. If there is no latest equipment upgrade package, skip to step 15. If a latest equipment upgrade package is available, the following prompt window pops up.

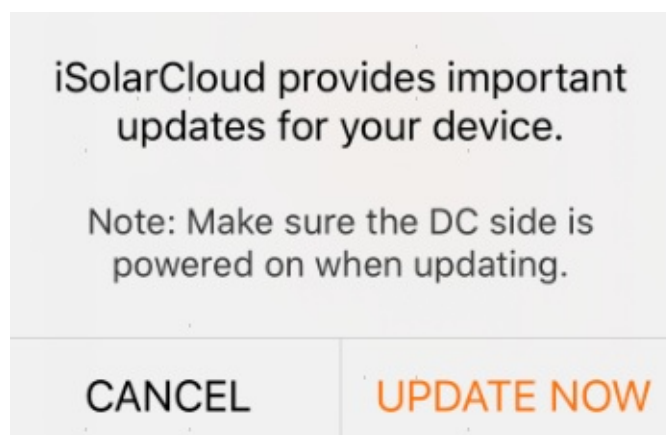

14. Tap “UPDATE NOW”. After successful upgrade, the screen will show the version numbers before

15.If initialization setting is not performed on the inverter, you will set the initialization protection parameters according to actual needs. After finishing the setting, tap “NEXT”.

The parameter "Country (region)" must be set to the country (region) where the inverter is installed at. Other

16.The screen displays that the inverter is successfully configured. Tap “NEXT”.


17.After the inverter is connected to the iSolarCloud, tap “COMPLETE” and finish the user review. Return to the App homepage on which information of the newly created plant will be displayed.

When the plant is created, or when you exit during the creation process, the "User Review" interface will pop up.

## Procedure

The operation steps for the communication device to be “WiNet” are as follows.

1.Enter the account and password on the login screen and tap “Login”, to enter the App home screen.

2.If there is no plant, tap “Create power plant”; and if there are plants, tap the icon  in the upper right corner to enter the creating screen.

3.Select plant type. If the plant is a residential plant, tap “RESIDENTIAL”; and if the plant is a commercial plant, tap “COMMERCIAL”.

4.Select inverter type. Tap “PV” when all inverters of the plant are PV inverter. Tap “HYBRID” when the plant has at least one hybrid inverter.

5.Add an inverter. You can scan the QR code on the communication device or manually enter the serial number of the communication device. Tap “Next” after the QR code is identified or the serial number entered is correct and then tap “CONFIRM”. The inverter is thus added successfully.

6.Select communication device is “WiNet”.

Skip to step 7 when scanning the QR code on the communication device adds an inverter.

7.Select inverter access. If the inverter is connected to the iSolarCloud via WLAN, tap “WLAN”; if the inverter is connected to the iSolarCloud via Ethernet, tap “Ethernet”.

- WLAN

(1) Tap “WLAN”, and prompt mobile device to connect to the local network. After connecting to the local network, return to the App and the screen will display that your mobile device is connected to the local network. Tap “NEXT”.

(2) The screen prompts that WiNet is set to EasyConnect mode. Tap “NEXT”.

(2) The screen prompts that WiNet is set to EasyConnect mode. Tap “NEXT”.

(3) Enter local network information. Enter the name and password for the local network, and tap “NEXT”.

(4) The screen prompts that the inverter is connected to the Internet. Tap “NEXT”.

If the screen prompts you for failure, tap "TRAY AGAIN" and repeat the above steps. Or tap on "WLAN DIRECT CO

a. The screen prompts to activate the AP hotspot. Tap “NEXT”.

b. The screen prompts that the mobile phone is connected to WLAN named in the form of “SG-communication module serial number”. Return to the App, and the screen displays successful connection to the WLAN. Tap “NEXT”.


c. Select local network. Select local WLAN network and enter the WLAN password. The symbol “√” indicates successful connection to the local Wi-Fi network. Tap “NEXT”, and the screen displays prompt information of successful connection to the local network. Tap “NEXT”.

- Ethernet

(1) Tap “ETHERNET”, and prompt to activate the AP hotspot. Tap “NEXT”.

(2) The screen prompts that the mobile phone is connected to WLAN named in the form of “SG-communication module serial number”. Return to the App, and the screen displays successful connection to the WLAN. Tap “NEXT”.

8. If there is no latest equipment upgrade package, skip to step 12. If a latest equipment upgrade package is available, the following prompt window pops up.

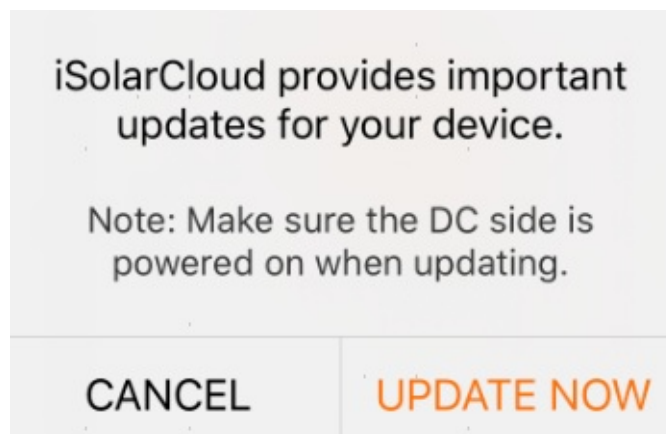

9. Tap “UPDATE NOW” to download the latest upgrade package.

10. Automatic device upgrade after download.

11. After successful upgrade, the screen will show the version numbers before and after the upgrade as well as the upgrade time. Tap “NEXT”.

The parameter "Country (region)" must be set to the country (region) where the inverter is installed at. Other


13.The screen displays that the inverter is successfully configured. Tap "NEXT".

14.The screen prompts that the mobile phone is connected to the Internet. Connect the mobile phone to the local network, or enable the "Mobile data".

15.Return to the App, and the screen displays successful connection to the Internet. Tap "NEXT".

16.The screen displays the inverter device added in step 5. Tap "Add more" and repeat step 5 to step 17, to add more inverters. Tap "NEXT".

17.Configure the plant. Tap "NEXT" to fill in the plant information.

| Parameter            | Description  | End&nbsp;user | Distributor/installer |
|----------------------|--|---------------|-----------------------|
| Plant name*          | Name of the plant,device serial number (default)   | √             | √                     |
| Plant time zone*     | Time zone of the plant   | √             | √                     |
| Country (region)*    | Country (region) where the plant is located at   | √             | √                     |
| Plant address*       | Location of the plant, which can be added in two manners.<br>Manual input: enter the plant location manually.<br>Automatic obtaining: tap the icon  to automatically obtain current location or search for plant location, and tap "Confirm". | √             | √                     |
| Postal code          | Zip code of the place where the plant is located at  | √             | √                     |
| Battery type**       | Type of the battery including lithium battery and lead-acid battery  | √             | √                     |
| Battery capacity**   | Capacity of the battery  | √             | √                     |
| Grid-connection date | Time at which the plant starts feed-in operation   | √             | √                     |

|                      |  |   |   |
|----------------------|--|---|---|
| Grid-connection date | Time at which the plant starts feed-in operation | √ | √ |
|----------------------|--|---|---|

Note: \* Indicates fields that must be filled in.

\*\* is only applicable to energy storage inverters.

18.(Optionally) Configure tariff. Tap “NEXT” to fill in the tariff information. The electricity price can be set to a specific value or Time-of-Use tariff.

Feed-in price: the price of selling power to the grid.

Consumption tariff: the price of purchasing power from the grid.

- Set electricity price

a.Select a price unit.

b.Enter the feed-in price and consumption tariff according to actual conditions, and tap “NEXT”.

- Set Time-of-Use tariff

a.Select a price unit.

b.Turn on the feed-in price and consumption tariff switches as you need.

c.Tap “ADD TIME SEGMENT”, enter unit price, set start time and end time, and click “CONFIRM”.

d.Optionally, repeat the foregoing step to set Time-of-Use tariffs for multiple time segments within a day.

e.Tap “Other time” and enter unit price for other time segment.

f.Tap “NEXT”.

Tap the time segment to enter the “EDIT TARIFF” screen, on which you can modify and delete Time-of-Use tariff.

Time-of-Use tariff should cover 24 hours and be different in each time segment.

19.Distributor/installer creates new a plant and fills in the end user’s e-mail address. The first time you fill in the end user’s e-mail address, the system will create an account for the end user and send a email to the end user. The Distributor/installer creates plants for the end user and can manage the plants by default.

If the plant type select "RESIDENTIAL", the end user's e-mail address is required. If the plant type select "

20. Tap “NEXT” to wait for the inverter to connect to the iSolarCloud.

21. After the inverter is connected to the iSolarCloud, tap “COMPLETE” and finish the user review. Return to the App home screen on which information of the newly created plant will be displayed.

When the plant is created, or when you exit during the creation process, the "User Review" interface will pop up.

# Sharing and Deleting Plant

## Sharing and Deleting Plant

---

This section describes how to share and delete plants.


### Plant sharing

End user can assign plants to other end users or distributor/installer for management.

#### Prerequisites

The end user has the permission to share plants, but the distributor/installer does not have the permission.

#### Procedure

1. Select the to-be-shared plant on the home screen, and tap the icon  on the right of the plant.
2. Tap "SHARE" to enter the "SHARE PLANT" screen.
3. Tap "ADD Share" to enter the corresponding screen.

Description of sharing permission

| Type            | Permission    | Description                      |
|-----------------|---------------|----------------------------------|
| Designated user | Browser       | User can only view plant data    |
| Designated user | Administrator | User can manage plant            |
| Visitor         | Browser       | Visitor can only view plant data |

4. Tap "Confirm", after which the added new information will be displayed on the plant sharing screen.

### Plant deletion


Delete the plant when it is connected abnormally or the corresponding onsite plant has been shut down.

#### Prerequisites

End user has the permission of deleting plants, and distributor/installer can delete plants assigned to the distributor/installer for management.

#### Procedure



1. Select the to-be-deleted plant on the home screen, and tap the icon  on the right of the plant.
2. Tap "DELETE".
3. Select "STILL DELETE" on the pop-up window.
4. Tap "CONFIRM DELETE" to delete the selected plant.

# Configuration


## Configuration

This section describes plant configuration, device configuration, device replacement, tariff configuration and smart IV curve diagnosis.

### Plant configuration

You can set plant name, plant type, etc.


#### Procedure

1. Tap a plant listed on the home screen to enter the plant detail screen.
2. Tap the icon  in the upper right corner of the detail screen, to enter the “Configuration” screen.
3. Select “Plant” to enter the corresponding screen.
4. Fill in the plant information.

Description of plant parameters

| Parameter                     | Description  | End&nbsp;user | Distributor/installer |
|-------------------------------|--|---------------|-----------------------|
| Plant name*                   | Name of the plant  | √             | √                     |
| Plant type*                   | Type of the plant including residential PV plant, residential energy storage plant, commercial PV plant, and microgrid | √             | √                     |
| Battery type**                | Type of the battery including lithium battery and lead-acid battery  | √             | √                     |
| Battery capacity**            | Capacity of the battery  | √             | √                     |
| Distributor/installer code*** | Fill in the distributor/installer code, so that the distributor/installer can view and manage the plant.               | √             | √                     |

|                                 |  |   |   |
|---------------------------------|--|---|---|
| Owner's phone or Owner's email* | The first time you fill in the end user's mobile phone number, the system will create an account for the end user and send a text message to the end user. The Distributor/installer creates plants for the end user and can manage the plants by default. | × | √ |
| Channel/Partner                 | Assign plants to other channel/partner for management. Refer to the "Plant sharing" chapter to set sharing permissions.  | √ | √ |
| Power installed                 | Installed power of PV modules  | √ | √ |
| Creation date                   | Time of constructing the plant   | √ | √ |
| Grid-connection date            | Time at which the plant starts feed-in operation   | √ | √ |
| Grid-connection type            | Type of grid-connection including 100% feed-in, self-consumption, surplus electricity feeds to grid, zero export and off-grid  | √ | √ |
| Time of connection              | Time at which iSolarCloud starts to monitor the plant  | √ | √ |
| Image                           | Upload plant picture   | √ | √ |
| Country (region)*               | Country (region) where the plant is located at   | √ | √ |
| Plant time zone*                | Time zone of the plant   | √ | √ |
| Plant zip                       | Zip code of the place where the plant is located   | √ | √ |
|                                 | Location of the plant, which can be added in two   |   |   |

|                  |   |   |   |
|------------------|---|---|---|
| Plant address*   | manners. Manual input: enter the plant location manually. Automatic obtaining: tap the icon  to automatically obtain current location or search for plant location, and tap "Confirm". | √ | √ |
| Delivery zip     | Zip code of the place of the receiver   | √ | √ |
| Delivery address | Address of receiver   | √ | √ |

Note: \* indicates fields that must be filled in.

\*\* applicable only to residential energy storage plant and microgrid.


\*\*\* indicates fields that must be filled in for distributor/installer.

5. Tap "Confirm" in the lower part of the screen to finish the plant configuration.

## Equipment configuration

You can add or delete communication devices on the device configuration screen.


1. Tap a plant listed on the home screen to enter the plant detail screen.

2. Tap the icon  in the upper right corner of the detail screen, to enter the "Configuration" screen.

3. Select "Device" to enter the corresponding screen.

4. Perform the following operations according to actual conditions.

- Add device

1. Tap the icon  in the upper right corner of the screen.


2. Scan the QR code on the communication module or manually input the serial number of the module. Tap "Confirm" after the QR code is recognized or the serial number input is correct.

3. Tap "Confirm" to finish the adding operation.


It takes 1 to 10 minutes to establish communication connection after the communication device is added. The r

- Delete device

1. Select a to-be-deleted device, swiping left (iOS) or pressing and holding (Android).


2. Tap the icon  (iOS) or “Delete” (Android), to delete the device.

- Querying device

1. Tap the icon  in the upper right corner of the screen.

2. Enter device name or S/N to view the corresponding devices.

- Modify device name

1. Tap the icon  next to the device name.

2. Modify the device name and tap “Confirm”.


## Device replacement

If plant device is faulty or it has been replaced on site, perform device replacement through the App.

You can replace communication device or inverter on the device replacement screen.


### Procedure


1. Tap a plant listed on the home screen to enter the plant detail screen.

2. Tap the icon  in the upper right corner of the detail screen, to enter the “Configuration” screen.


3. Select “Device replacement” to enter the corresponding screen.


4. Tap “Continue”.

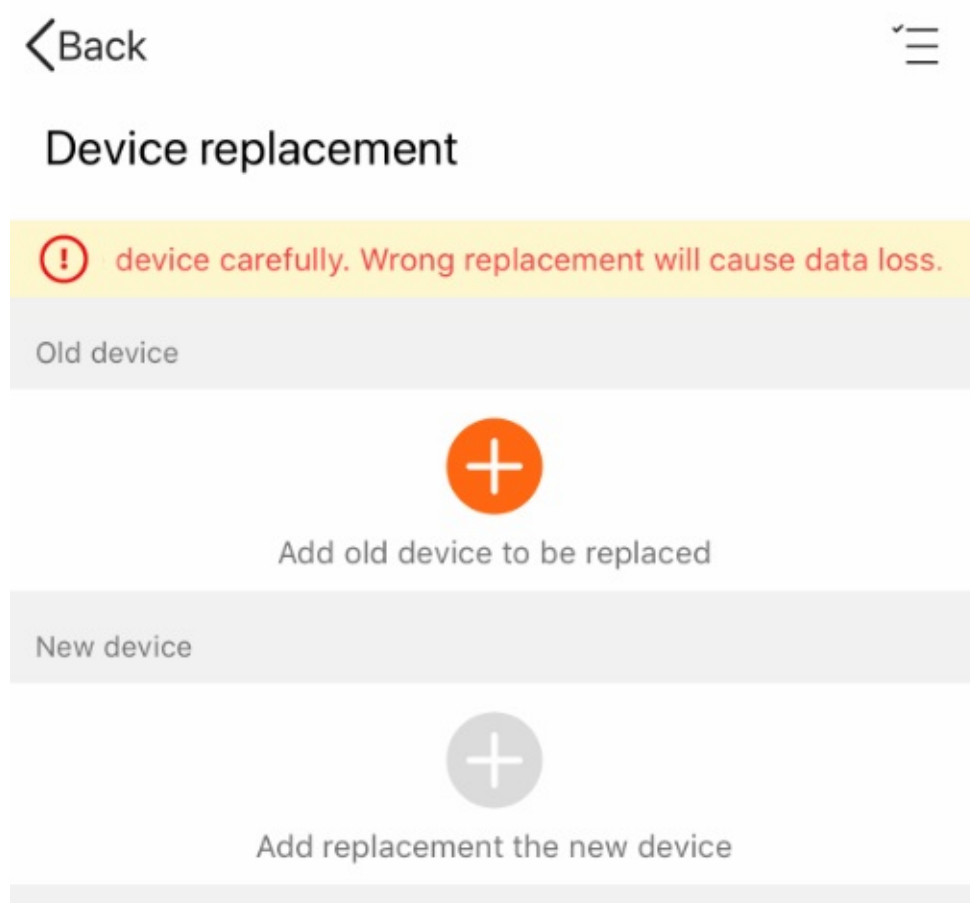

5. Tap the icon  under “Old device” to enter the “Add old device” screen. You can add old devices in the following two manners:

- Switch the “Communication device” tab and “Inverter” tab, and select desired to-be-replaced device from the device list under corresponding tab.
- Enter the inverter name or communication device serial number into the searching box.

6. Tap the icon  in the upper right corner of the screen after selecting the to-be-replaced device, so as to successfully add the device.

7. Tap the icon  under “New device” to enter the “Add new device” screen.

8. Scan the QR code on the communication module or inverter, or manually input the serial number of the device, to add the new device.

9. Tap “Start replacement” after confirming that the old device and new device are desired ones. Device replacement is completed once the instruction delivered successfully.


When replacing an inverter, you can tick "Power generation compensation to new device", so that the total power

## Tariff

Tariff is used for revenue calculation. This section describes how to set specific electricity price and TOU tariff.

### Procedure

1. Tap a plant listed on the home screen to enter the plant detail screen.

2. Tap the icon  in the upper right corner of the detail screen, to enter the "Configuration" screen.

3. Select "Tariff" to enter the corresponding screen. The electricity price can be set to a specific value or Time-of-Use tariff.

- Set electricity price

a. Select a price unit.

b. Enter the feed-in price and consumption tariff according to actual conditions, and tap "Confirm".

- Set Time-of-Use tariff

a. select a price unit.

b. Turn on the feed-in price and consumption tariff switches as you need.

c. Tap "ADD TIME SEGMENT", enter unit price, set start time and end time, and click "CONFIRM".

d. Optionally, repeat the foregoing step to set Time-of-Use tariffs for multiple time segments within a day.

e. Tap "Other time" and enter unit price for other time segment.

f. Tap "Confirm".

Tap the time segment to enter the "EDIT TARIFF" screen, on which you can modify and delete Time-of-Use tariff.


Time-of-Use tariff should cover 24 hours and be different in each time segment.

## Smart IV Curve Diagnosis

Scan PV module IV curve in online manner, automatically locate faulty PV modules through the diagnostic algorithm analysis, and generate diagnostic reports and O&M advice, etc. thereby greatly improving O&M efficiency and power generation.

### Procedure

1. Tap a plant listed on the home screen to enter the plant detail screen.

2. Tap the icon  in the upper right corner of the detail screen, to enter the "Configuration" screen.

3. Select “Smart IV Curve Diagnosis” to enter the corresponding screen , on which you can perform unit level scanning and inverter level scanning(See “Operation - Remote Monitoring - Smart IV Curve Diagnosis”).



# Viewing Plant Information

## Viewing Plant Information

This section describes how to view power generation information and information of plant devices.


Parameters displayed may vary with plant types, and actual screens prevail.

Description is given by using residential PV plant as an example.


### Plant information

1. Tap a plant listed on the home screen to enter the plant detail screen.
2. Tap “Overview” tab to view power generation information of the plant.

| Parameter                          | Description  |
|------------------------------------|--|
| Power flow chart                   | Including information such as PV power generation power and feed-in power, where the line with an arrow indicates energy flow between connected devices, and the arrow pointing indicates energy flow direction. |
| Real-time power                    | Present output power of all inverters in the plant   |
| Installed power                    | Installed power of PV modules  |
| Today yield                        | Today power yield of all inverters in the plant  |
| Total yield                        | Accumulative power yield of all inverters in the plant   |
| E-use today                        | Display the electricity consumption of the plant today   |
| Cumulative electricity consumption | Display the cumulative electricity consumption of the plant  |
| Today revenue                      | Today's revenue  |
| Total revenue                      | Total revenue  |
| Power                              |  |

|   |   |
|---|---|
| generation chart                            | Including daily, monthly, and annual power generation histograms  |
| Weather                                     | Weather of today, tomorrow, and the day after tomorrow  |
| Energy Conservation and Emissions Reduction | Including information such as CO2 emission reduction, equivalent trees planted, and save standard coal. Click the icon  to view the calculation standards for energy conservation and emissions reduction of PV power generation |

## Device information

1. Tap a plant listed on the home screen to enter the plant detail screen.
2. Tap “Device” tab to view all devices of the plant.
3. Optionally, tap the icon  in the upper right corner to screen devices displayed. You can screen according to device state and device type.
4. Tap device name, and you will enter “General information” screen by default. Switch the tabs “Active Fault”, “Fault History”, “Curve”, “Yield information”, and “Settings” to access respective screen.

Parameters displayed may vary with device types, and actual screens prevail.

Description is given by using PV inverter as an example.

### Description of plant parameters


| Tab                 | Description  |
|---------------------|--|
| General information | Display information such as device working status, WLAN signal strength, power generation, phase voltage, phase current, and power factor. |
| Existing fault      | Display fault lists including fault, alarm, prompt, and advice.  |
| Fault history       | Display a list of historical fault messages that have been cleared.  |
| Curve               | Display the equipment's power generation history curve.  |
| Energy information  | Display inverter power change curve.   |
| Settings            | You can perform initial grid-connection setting on the inverter.<br>You can further set system parameters, protection parameters and       |

|  |                |
|--|----------------|
|  | power control. |
|--|----------------|

## Fault information

1. Tap a plant listed on the home screen to enter the plant detail screen.
2. Tap “Fault” to enter the corresponding screen, where the screen displays the fault list whose types are “Fault” and “Alarm” by default.
3. Enter fault name and select fault state, plant name, and fault type, to view corresponding fault list.
4. Tap the fault name to view detailed fault information.

## Remote Signaling Status

1. Tap a plant listed on the home screen to enter the plant detail screen.
2. Tap “Device” tab to view all devices of the plant.
3. Tap device name, and you will enter “General information” screen by default.
4. Tap “Remote Signaling Status” tab to view parameter information of the device.
5. Click the icon  and then select time segment to view history information.

# Device Initialization

## Device Initialization

---

### Prerequisites

If the inverter has not been initialized, perform initial grid-connection setting.

If there are multiple inverters that have not been initialized, perform initial grid-connection setting for each inverter.

### Procedure

1. Tap a plant listed on the home screen to enter the plant detail screen.
2. Tap “Device” tab. Tap the name of the device that needs to be initialized and switch to “Settings” tab.
3. Tap “Initial grid connection” to enter the corresponding screen.
4. Set initial grid-connection parameters.

Parameters displayed may vary with device types, and actual screens prevail.

Different countries (regions) have different parameter setting requirements, please refer to the local regulations.

Description is given by using PV inverter as an example.

Description of initial grid-connection parameters

| Parameter        | Description                                       |
|------------------|---|
| Country (region) | Country (region) where the inverter is located at |
| Grid type        | Type of grid                                      |

The parameter "country (region)" must be set to the country (region) where the inverter is installed.


5. Tap “Send down instruction” to finish the initial grid-connection setting.

# Cleaning Robot

## Cleaning Robot

This section introduces how to view the cleaning robot information and information on devices in the power plant, as well as how to add, start and stop the cleaning robot.

### Cleaning Robot Information

On the power plant list interface, tap the plant with the icon  in the lower right corner of the plant picture, to enter the “Cleaning Robot” tab by default, on which you can view the cleaning robot information.

| Plant Parameter   | Description  |
|-------------------|--|
| Current Status    | Display the current status of the cleaning robot in the plant  |
| Fault Alarm       | Display the number of faults and alarms related to the cleaning robot in the plant.  |
| Scheduled Tasks   | Display the latest three tasks of the cleaning robot.  |
| Availability      | Display information including number of operating cleaning robots, un-operating cleaning robots, and availability in the last 15 days by default. Tap time to change the time range. |
| Cleaning Times    | Display information including number of operating cleaning robots and cleaning hours in the last 15 days by default. Tap time to change the time range.                              |
| Plant Information | Display information such as plant picture, cleaning capacity, and installed power.   |

### Device Information

For detailed operation instructions, refer to “Viewing Plant Information”.



### Cleaning View


This section describes how to start, stop, and add cleaning robots.

### Prerequisites

The current user has the permission of operating the cleaning robot.


## Procedure

1. On the power plant list interface, tap the plant with the icon  in the lower right corner of the plant picture, to enter the “Cleaning Robot” tab.
2. Tap the icon  in the upper right corner, to enter the “Cleaning View” interface.
3. Perform the following operations if necessary.
  - Start all cleaning robots


Tap the icon  **Start All**, to access the “Settings” window. Enter task name, select instruction valid period, and tap “CONFIRM AND ISSUE”, so that the system will generate the parameter delivery task. The “Instruction valid period” can be set to 0.5h, 1h, or 72h.

If the delivered instruction has not been executed within the set time, it will turn to be invalid.


- Stop all cleaning robots

Tap the icon  **Stop All**, to access the “Settings” window. Enter task name, select instruction valid period, and tap “CONFIRM AND ISSUE”, so that the system will generate the parameter delivery task. The “Instruction valid period” can be set to 0.5h, 1h, or 72h.


- Start the cleaning robot

Select a PV array, and tap the icon  , to access the “Settings” window. Enter task name, select instruction valid period, and tap “CONFIRM AND ISSUE”, so that the system will generate the parameter delivery task. The “Instruction valid period” can be set to 0.5h, 1h, or 72h.


- Stop the cleaning robot

Select a PV array, and tap the icon  , to access the “Settings” window. Enter task name, select instruction valid period, and tap “CONFIRM AND ISSUE”, so that the system will generate the parameter delivery task. The “Instruction valid period” can be set to 0.5h, 1h, or 72h.

- Reverse operation of the cleaning robot


Select a PV array, and tap the icon  , to access the “Settings” window. Enter task name, select instruction valid period, and tap “CONFIRM AND ISSUE”, so that the system will generate the parameter delivery task. The “Instruction valid period” can be set to 0.5h, 1h, or 72h.

- Rest the cleaning robot


Select a PV array, and tap the icon  , to access the “Settings” window. Enter task name, select


instruction valid period, and tap “CONFIRM AND ISSUE”, so that the system will generate the parameter delivery task. The “Instruction valid period” can be set to 0.5h, 1h, or 72h.

- View device information

Select a PV array, and tap the icon , to access the “DEVICE INFORMATION” window, on which device running information and running records are displayed.



- View history tasks

Tap the icon  in the upper right corner, to access the “TASK HISTORY DETAILS” interface.



Optionally,) tap the icon  in the upper right corner and enter task name, to view corresponding history tasks.


Tap the task name to view instruction name, set value, read-back value, and execution result.

- Pre-set cleaning operation

Tap the icon  in the upper right corner, and then the icon , to access the “CLEANING PREVIEW” interface, on which parameters, such as plant width and cleaning rows, can be set.

- Add cleaning robots

Tap the icon  in the upper right corner, and then the icon  in the lower right corner, to fill in device information.

| Plant Parameter                     | Description   |
|-------------------------------------|---|
| Device S/N                          | Enter the device S/N, or tap the icon  on the right to scan the S/N on the cleaning robot. |
| Device Name                         | Set the name of the cleaning robot.   |
| Starting Coordinates (X,Y)          | Set the location from where the cleaning robot starts working.  |
| Cleaning Direction                  | Select the cleaning direction.  |
| Number of Single Rows to be Cleaned | Set the number of PV panels to be cleaned in a single row.  |
| Single-Module Cleaning Distance     | Set the distance for the cleaning robot to clean a single PV panel.   |



## Cleaning Strategy

This section describes how to set cleaning strategy.

## Prerequisites

The current user has the permission of setting cleaning strategy.

## Procedure

1. On the power plant list interface, tap the plant with the icon  in the lower right corner of the plant picture, to enter the “Cleaning Robot” tab.
2. Tap the icon  in the upper right corner, to access the “CONFIGURATION” interface.
3. Tap “Cleaning Strategy”, to access the cleaning strategy interface.
4. Tap “Policy 1”, to access the “ADD” interface.
5. Perform the following operations if necessary.

- Temporary Strategy

Execute the cleaning strategy only once in the specified time.

Select “Temporary Strategy”, to set start date and start time, and tap “CONFIRM”.

- Fixed Strategy

Execute the cleaning strategy periodically in the specified time.

Select “Fixed Strategy”, to set start date, start time, and cleaning interval (Days), and tap “CONFIRM”.

1. (Optionally) repeat step 4 and step 5, to add the cleaning strategy 2 to cleaning strategy 4.
2. Tap “APPLY SETTINGS”, enter task name, select instruction valid period, and tap “CONFIRM AND ISSUE”, so that the system will generate the parameter delivery task. The “Instruction valid period” can be set to 0.5h, 1h, or 72h.

If the delivered instruction has not been executed within the set time, it will turn to be invalid.




# Viewing Fault Information

## Viewing Fault Information

---

This section describes how to query fault types and view detailed fault information.

### Procedure

1. Tap “Fault” to enter the corresponding interface, on which the faults whose types are “Fault” and “Alarm” are displayed by default.
2. Tap the icon  to Enter fault classification or fault code and select fault state, plant name, and fault type, to view corresponding fault list.
3. Tap the fault name to view detailed fault information.
4. Tap the faulty device on Fault Detail interface to jump to the device detail interface.
5. Tap the name of the associated plant on Fault Detail interface to jump to the single plant overview interface.



# More


## More

This section describes WLAN configuration, FAQs, and personal setting.

Tap “More”, to enter the corresponding screen.

Parameter description

| Parameter                | Description   |
|--------------------------|---|
| Profile                  | You can view and modify the general information of the account. The distributor/installer can also view and modify organization information.  |
| WLAN configuration       | For details, refer to “WLAN Configuration”.   |
| Local access             | For details, refer to “WLAN Login (Near End)” and “Bluetooth Login (Near End)”.   |
| Firmware Download        | For details, refer to “Firmware Download” .   |
| Smart IV Curve Diagnosis | For details, refer to “Smart IV Curve Diagnosis”.   |
| Message Center           | You can view the history records of creating plants, sharing plants, upgrading device, and changing installers.   |
| My Service Provider      | You can view service provider information.  |
| FAQs                     | You can view frequently asked questions about using the App.  |
| Feedback                 | You can submit your feedback. Tap the icon (  ) in the upper right corner to view all feedback.  |
|                          | <p>You can perform private settings.</p> <ol style="list-style-type: none"> <li>1. Tap “General” and “Default Language”, to switch the language. Alternatively, you may tap the icon (  ) in the upper right corner and select “Language”, to switch the language.</li> <li>2. Tap “General” and “Unit” to switch the units of radiation and temperature.</li> <li>3. Tap “Report push” and “Add” to enter the corresponding screen. Tap “Add”, fill in receiver e-mail address, select the</li> </ol> |






|          |   |
|----------|---|
| Settings | <p>desired type of reports (“Daily Report”, “Weekly Report”, “Monthly Report” and “Annual Report”), and tap the icon (  ) in the upper right corner of the screen. You can view information such as revenue, power generation, energy conservation and emission reduction.</p> <p>4. Tap “Account and Security” to bind the phone number or email address for retrieving password. You can change the password and cancel the account.</p> <p>5. Tap “Notification” to determine whether to receive notifications. If you turn off “Allow notifications”, you will not receive system notifications after parameter setting.</p> <p>6. Tap “Application Sharing” to invite friends to scan and download the App.</p> <p>7. Tap “Declaration” to view system declaration terms.</p> <p>8. Tap “About” to view system version and privacy policy.</p> <p>9. Tap “Website” to jump to SUNGROW official website and view more information.</p> |
|----------|---|

# Firmware Download

## Firmware Download

---

Users can download the upgrade package of the firmware through “Firmware Download”.

1. Click “More”->“Firmware Download” to enter corresponding interface on which you can view the device list.
2. The default device type is Inverter. Click  to filter the device type you need to upgrade.
3. Click , enter “Device Model” and click “Enter” or “Search” to search for the device that needs to perform a firmware upgrade.
4. Click the device name in the device list to enter the firmware upgrade package detail interface, and click  behind the firmware upgrade package to download it.
5. Return to the “Firmware Download” interface, click  in the upper right corner of the interface to view the downloaded firmware upgrade package.
6. Click on the name of the upgrade package and then , select the upgrade package, and click “Delete” to delete the corresponding upgrade package.
7. Optional: Click “Delete All” at the bottom left of the page, the Delete All confirmation prompt box will pop up, click “Confirm”, and the system will delete all downloaded upgrade packages.

# Smart IV Curve Diagnosis

## Smart IV Curve Diagnosis

---

Scan PV module IV curve in online manner, automatically locate faulty PV modules through the diagnostic algorithm analysis, and generate diagnostic reports and O&M advice, etc. thereby greatly improving O&M efficiency and power generation.

### IV Intelligent Curve



This section describes how to scan IV curve and view the diagnosis analysis.

#### Prerequisites

The user has the permission of the “Smart IV Curve Diagnosis”.

#### Unit Scan

1. Tap “More -> Smart IV Curve Diagnosis” to enter the “Select plant” interface.
2. Select the desired plant.
3. Enter the “Unit Scan” interface by default.
4. Select unit devices and tap “Start Diagnosis” in the lower right corner. The system will judge whether the device parameters have been configured. If not, a “Prompt” window will pop up. Tap “Complete them now” to jump to the corresponding interface and perform parameter settings. Set plant terrain, tap “Confirm and continue”. Tap the inverter that needs to be parameterized and set the parameters as required.
  - a. Single setting: After finishing parameter setting, tap “Confirm”.
  - b. Batch setting: After finishing parameter setting, tap “Confirm and copy”. Select the inverters that require the same settings, tap “Confirm”.
5. Enter task name and login password on the pop-up window and tap “Confirm”.
6. After the instruction is delivered successfully, the unit state is changed to “Scanning” and you can view the scanning progress.
7. After the scanning, tap “Diagnosis complete, ready to view” to enter “Task List” interface.
8. Tap the task name to enter “Report List” interface.
9. Tap “New Report” to enter the corresponding interface.
10. Select report type and unit equipment, tap “New Report” to enter “Report List” interface.

11. Tap the report name to enter “Report List” interface. Tap the icon  to preview the diagnostic report online. Tap the icon , prompt for successful copying. Open the copied website in your browser and download the diagnostic report.

### Inverter Scan

1. Tap “More -> Smart IV Curve Diagnosis” to enter the “Select plant” interface.
2. Select the desired plant.
3. Enter the “Unit Scan” interface by default.
4. Tap “Inverter Scan” to scan a single inverter or several inverters.
5. Select inverters and tap “Start Diagnosis” in the lower right corner.
6. Refer to step 5 to step 11 in unit level scanning.

Residential PV plant and residential energy storage plant only have inverter level scan.


### Parameter Setting


This section describes how to set plant or inverter parameters.

#### Prerequisites



The user has the permission of the “Smart IV Curve Diagnosis”.

#### Procedure

1. Tap “More -> Smart IV Curve Diagnosis” to enter the “Select plant” interface.
2. Select the desired plant.
3. Tap the icon  in the upper right corner to enter the “Settings” interface.
4. Perform the following operations if necessary.
  - Set plant terrain on the “Parameter Setting” interface. After finishing the parameter setting, click “Confirm” to save the operation.
  - Tap the tab “Inverter Parameters”. Tap the inverter that needs to be parameterized and set the parameters as required.
    - a. Single setting: After finishing parameter setting, tap “Confirm”.
    - b. Batch setting: After finishing parameter setting, tap “Confirm and copy”. Select the inverters that require the same settings, tap “Confirm”.

- Tap the icon  in the upper right corner to enter the “Item management” interface, on which you can query, add, delete, or view PV module information.




You can only delete and modify the information of the components you have added.

- Query PV module: tap the icon  in the upper right corner, enter PV module manufacturer and module type, select the filter range as “Last three years” or “All” to view corresponding PV modules.
- Add PV modules: tap the icon  in the upper right corner, to fill in corresponding information and tap “Confirm”.
- Delete PV module information: tap “Edit” in the upper right corner, select the desired PV module information. Tap “Delete” on the pop-up window, and tap “Confirm” on the prompt window to finish the operation.
- View PV module information: tap module type to enter the “PV module information” interface, on which you can view detailed information on the PV modules.

## View Task History

You can view the IV scanning records.

### Procedure

1. Tap “More -> Smart IV Curve Diagnosis” to enter the “Select plant” interface.
2. Tap the icon  in the upper right corner, to enter “Task List” interface.
3. Tap the task name to enter “Report List” interface.
4. Tap “New Report” to enter the corresponding interface.
5. Select report type and unit equipment, tap “New Report” to enter “Report List” interface.
6. Tap the report name to enter “Report List” interface. Tap the icon  to preview the diagnostic report online. Tap the icon , prompt for successful copying. Open the copied website in your browser and download the diagnostic report.

# Live Data

## Live Data




---

Users with live data permission can use this function to judge the operating status of the device.

### Prerequisites

The current user has permission for live data function.

### Procedures

1. Click “More -> Live Data” to enter the “Plant” interface.
2. Enter the plant name to view the plant of which the live data function needs to be enabled/disabled or to view the live data of the plant.
3. Live data switch
  - Tick the devices of which the live data function needs to be enabled/disabled, or tick “Total Plant Devices” at the bottom of the interface.
  - Click “Close” to disable the live data function; click “Open” to enable the live data function.
  - Optional: Click the device to go directly to the live data interface, and click  button at the top right of the page to enable/disable the live data function.
1. View live data
  - Click the device to enter the live data interface. The interface displays the measuring point interface and the curve interface.
  - Click  behind the measuring point to view the measuring point curve.
  - Measuring point preceded by  is a live data measuring point that is not supported by the current device.



# WLAN Login (Near End)

## WLAN Login (Near End)

---

In case of WLAN direct login, a WiFi wireless communication module researched by SUNGROW is required.

The WiFi wireless communication module establishes a communication connection with the mobile phone through WLAN, achieving near-end maintenance on the inverter. Users can view inverter information and set parameters through the App.

Parameters displayed may vary with inverter types, and actual screens prevail.

Description is given by using PV inverter as an example.

# Login

## Login

---

### Prerequisites


- The AC side of the inverter is energized.
- The WLAN function of the mobile phone is enabled.
- The mobile phone is within the coverage of the wireless signal of the WiFi module.

### Procedure

- 1.Enable the WLAN function of the mobile phone, connect the phone to the WLAN network named in the form "SG-WiFi module serial number" (the serial number is on the side of the WiFi module).
- 2.Return to the login screen after a successful connection, tap "Local Access", and select "WLAN" on the next screen.
- 3.User name is "User" by default. Enter login password and tap "Login".

The initial password is "pw1111" which should be changed for the consideration of account security.

- 4.If there is no latest equipment upgrade package, skip to step 10. If a latest equipment upgrade package is available, the following prompt window pops up.

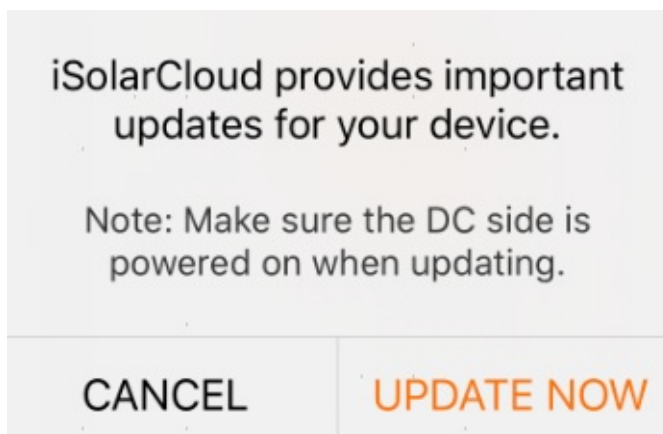

- 5.Tap "UPDATE NOW" to prompt the phone to reconnect to the Internet. Disconnect the mobile phone from the inverter WLAN to ensure the phone can normally access the Internet. Then connect the mobile phone to the local network, or enable the "Mobile data".
- 6.Return to the App, and the screen displays successful connection to the Internet. Tap "NEXT" to download the latest upgrade package.

7. After download, tap "NEXT" to prompt the phone to reconnect to the inverter WLAN.

8. Return to the App, and the screen displays successful connection to the inverter. Tap "NEXT" to update device.

9. After successful upgrade, the screen will show the version numbers before and after the upgrade as well as the upgrade time. Tap "COMPLETE".

If the communication equipment is upgraded, after successful upgrade, check and confirm that the phone is connected to the inverter.

10. If initialization setting is not performed on the inverter, you will enter the quick setting screen of initialization protection parameter after successful login. After finishing the quick setting, tap "Boot" in the upper right corner of the quick setting screen. The App delivers the start instruction, and the inverter starts and operates.




The parameter "country (region)" must be set to the country (region) where the inverter is installed at. Other parameters can be left as default.

11. You will enter the App home screen after finishing the initialization setting.

# Function Overview

## Function Overview


You can view inverter real-time power and power generation, to start/stop the inverter, and to upgrade firmware, etc.

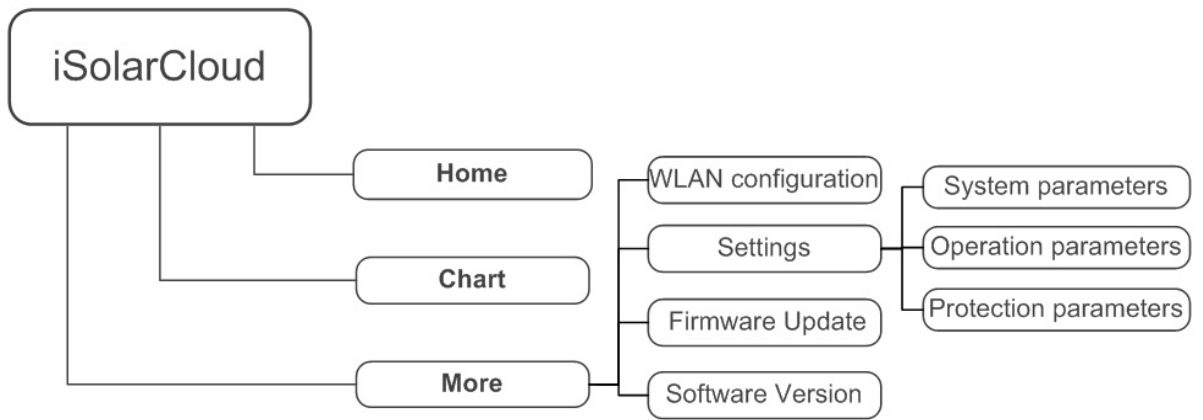

# Home


## Home

You will enter the home screen after login.

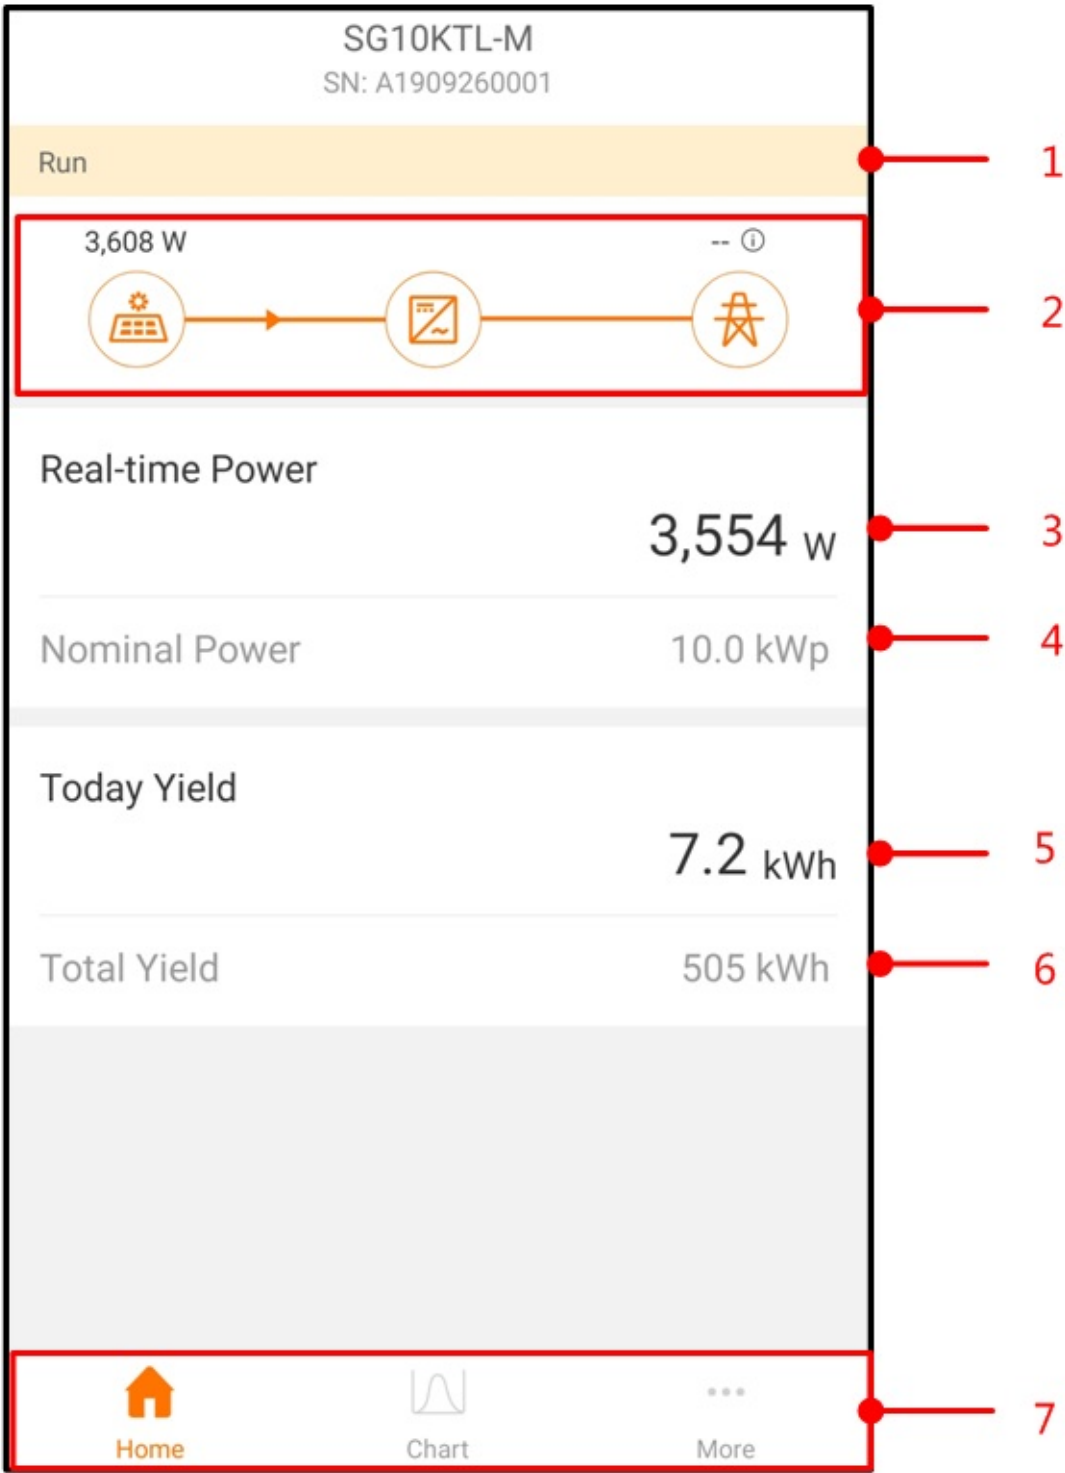

## Function description of home screen

| No. | Name                       | Description   |
|-----|----------------------------|---|
| 1   | Inverter state             | Present operation state of the inverter   |
| 2   | Power&nbsp;flow&nbsp;chart | Indicate the PV power generation power, feed-in power, etc. The line with an arrow indicates energy flow between connected devices, and the arrow pointing indicates energy flow direction. |
| 3   | Real-time power            | Present output power of the inverter  |
| 4   | Nominal power              | Nominal power of PV modules   |
| 5   | Today yield                | Today power yield of the inverter   |
| 6   | Total yield                | Accumulative power yield of the inverter  |
| 7   | Navigation bar             | Including menus of “Home”, “Chart”, and “More”  |

If the inverter runs abnormally, the fault icon  appears in the upper left corner of the screen. Users can tap the icon to view detailed fault information and corrective measures.

# Chart


## Chart

The App displays power generation records in a variety of forms, including daily power generation graph, monthly power generation histogram, annual power generation histogram, and total power generation histogram.

Description of power generation chart

| Parameter                          | Description   |
|------------------------------------|---|
| Daily power generation graph       | Curve showing change of power between 5 am and 22 pm every day. (Each point on the curve corresponds to a power value). |
| Monthly power generation histogram | Display power generation of the current month and monthly equivalent hours.   |
| Annual power generation histogram  | Display power generation of the current year and annual equivalent hours.   |
| Total power generation histogram   | Display total power generation and total equivalent hours.  |

1.Click “Chart” on the navigation bar to enter the screen showing daily power generation curve.

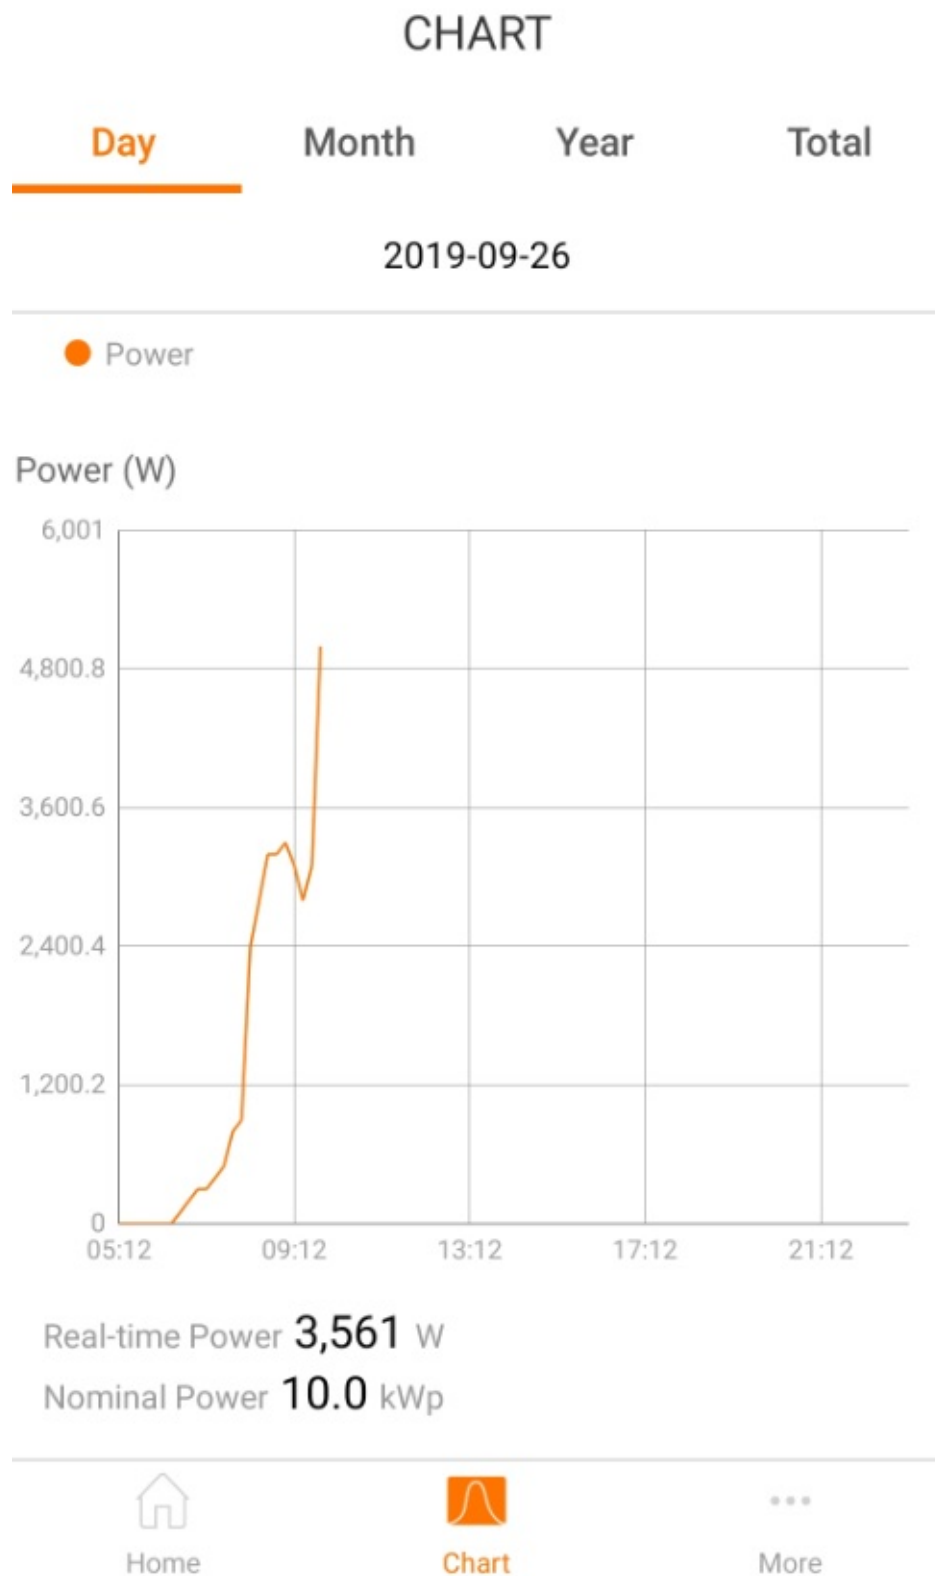

2. Swipe the screen left to view monthly power generation histogram, annual power generation histogram, and total power generation histogram.






# More

## More

Tap “More” to enter the corresponding screen, on which you can perform WLAN configuration,

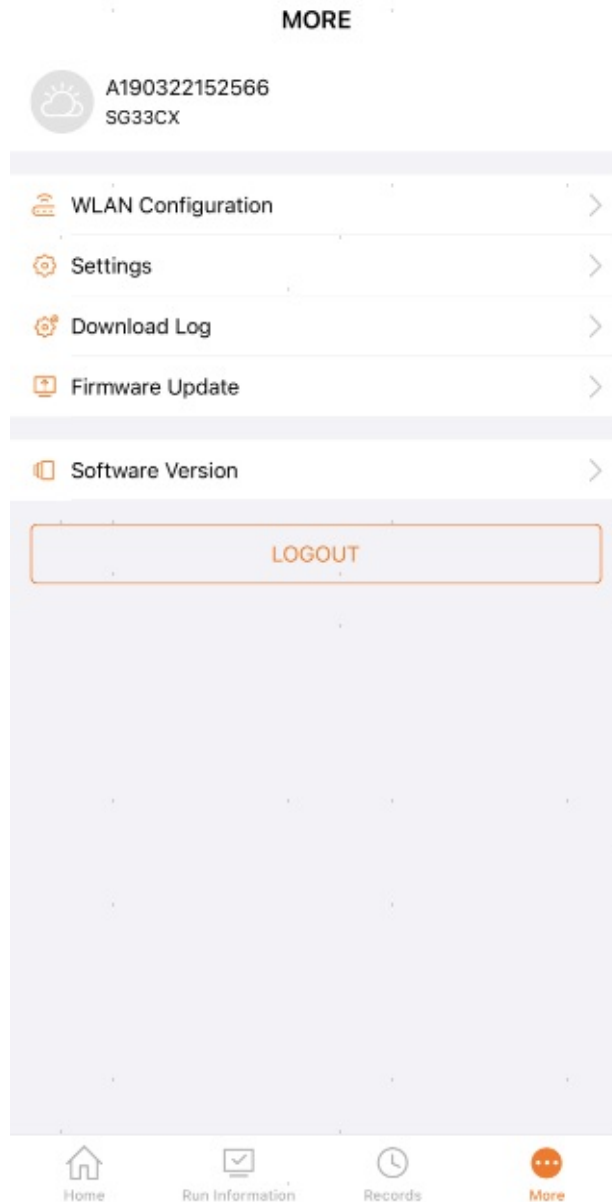

settings, update firmware, etc.

Description of parameters on the “More” screen

| Parameter          | Description  |
|--------------------|--|
| WLAN Configuration | The WiFi module can be connected to the home network, so that the inverter can communicate with the iSolarCloud server. Users can view inverter data or send instructions to control the inverter through the App. |

|                  |   |
|------------------|---|
| Settings         | Tap “Settings” to set inverter system parameters, operation parameters and protection parameters. |
| Firmware update  | Tap “Firmware Update” to upgrade the firmware of the inverter.                                    |
| Software version | Tap “Software Version” to view the version of the software.                                       |

## WLAN Configuration

### Prerequisites


- You have already got the account and password from the distributor/installer or SUNGROW.
- The inverter has been connected with the WiFi wireless communication module researched by SUNGROW.
- You have got the WLAN name and password of the home network.

### Procedure

1. Enter the account and password on the login screen and tap “Login”, to enter the App home screen.
2. Tap “More” on the navigation bar to enter the corresponding setting screen.
3. Tap “WLAN Configuration” to enter the corresponding screen.
4. Connect to the inverter WLAN. For Android system, tap “Settings” to automatically enter the wireless network screen. For iOS system, manually switch to “Settings-WLAN”. Select the inverter WLAN named in the form of “SG-WiFi module serial number”, where the serial number can be found on the side of the WiFi module.



5. Prompt information will pop up once you successfully connect to the inverter WLAN.

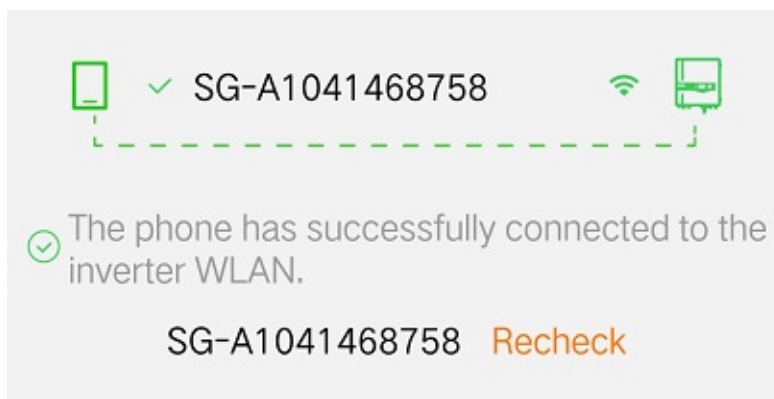

6. Tap “Next” at the lower part of the screen to connect the inverter to the home network. Select the home network WLAN and enter the password. The symbol “√” indicates a successful connection to the home network WLAN.



Please select the home network connection for the inverter.



SG-A20190119



OPPO R15x



SG-A190206I864



MERCURY\_NO1



MW\_TEST



SG-CG666888



sungrow-cloud



qiang的 iPhone



sungrow



7. Tap "Next", and information indicating a successful connection to the home network will pop up. Tap "Complete" to finish the WLAN configuration.




sungrow



**The inverter has successfully connected to the home network.**

Connect your mobile device back to the Internet, then switch to the iSolarCloud APP to continue.

**Proceed to Set>>**


Alternatively, you can tap the icon  in the upper right corner on the login screen and select WLAN

configuration to configure the WLAN.

Disconnect the mobile phone from the inverter WLAN to ensure the phone can normally access the Internet. Then

Parameter Setting

- 1. Tap “Settings” to enter the parameter setting screen.
- 2. You can set inverter system parameters, running parameters and protection parameters.

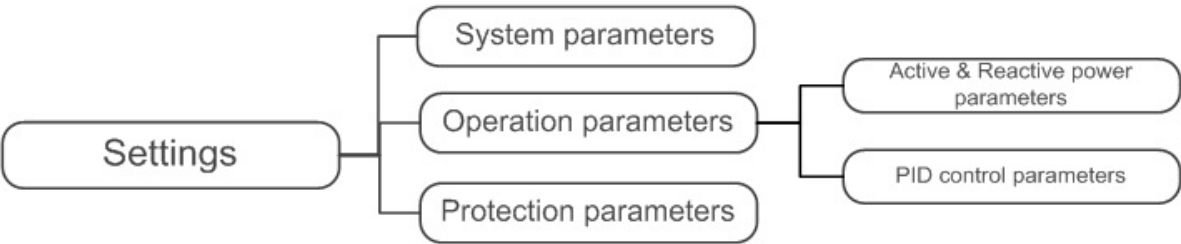

Parameter ranges and default values will update from time to time, and the actual screens prevail. If there a

Firmware Update

This section describes how to upgrade inverter firmware.

Prerequisite

The user has the permission of upgrading firmware.

Procedure

- 1. Obtain the firmware upgrade package. See “Firmware Download” for details.
- 2. Click “More” -> “Local Access” -> “WLAN” on the remote terminal to log into the system. For details, please refer to “Login”.
- 3. Click “More” -> “Firmware Upgrade” in the navigation bar to enter the firmware upgrade interface.
- 4. Click the upgrade package file, a prompt box will pop up asking you to upgrade the firmware with the file, click “Confirm” to perform the firmware upgrade.
- 5. Wait for the file to be uploaded. When the upgrade is finished, the interface will inform you of the upgrade completion. Click “Complete” to end the upgrade.

When the user has not copied the local upgrade package and remote download upgrade package, the upgrade packa

Click "Download Now" to jump to the "More" interface. Click "Firmware Download", follow the steps to complete

If the WiFi wireless communication module is upgraded from non-encrypted version to encrypted version, the pa



# Bluetooth Login (Near End)

## Bluetooth Login (Near End)

---

The WiFi wireless communication module establishes a communication connection with the mobile phone through Bluetooth, achieving near-end maintenance on the inverter. Users can view inverter information and set parameters through the App.

Parameters displayed may vary with inverter types, and actual screens prevail.



# Login


## Login

### Prerequisites

- The AC side of the inverter is energized.
- The mobile phone is within 5m away from the inverter and there are no obstructions in between.
- The Bluetooth function of the mobile phone is enabled.
- The mobile phone has had access to network

### Procedure


1.Open the App, tap “Local Access”, and select “Bluetooth” on the next screen, after which the Bluetooth search screen automatically pops up.

2.Select the to-be-connected inverter according to the serial number on the nameplate on the side of the inverter. Alternatively, tap the icon  to scan the QR code on the side of the inverter to establish Bluetooth connection.

3.User name is “user” by default. Enter the login password and tap “Login”.

The initial password is "pw1111" which should be changed for the consideration of account security.

4.If there is no latest equipment upgrade package, skip to step 8. If a latest equipment upgrade package is available, the following prompt window pops up.

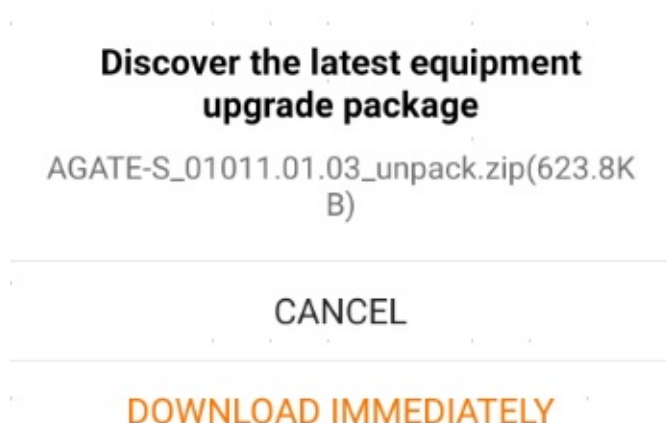


5.Tap “DOWNLOAD IMMEDIATELY” to download the latest upgrade package. After download, tap “UPGRADE IMMEDIATELY” to access the firmware upgrade interface.

6.If upgrade fails, a corresponding prompt window will pop up. Tap “CONFIRM” to continue the

upgrade. After successful upgrade, the interface will show the version numbers before and after the upgrade as well as the upgrade time. Tap “COMPLETE”, and then “CLOSE” on the pop-up prompt window.

7.Repeat step 2 and step 3.

8.If initialization setting is not performed on the inverter, you will enter the quick setting screen of initialization protection parameter after successful login. After finishing the quick setting, tap “Boot” in the upper right corner of the quick setting screen. The App delivers the start instruction, and the inverter starts and operates.

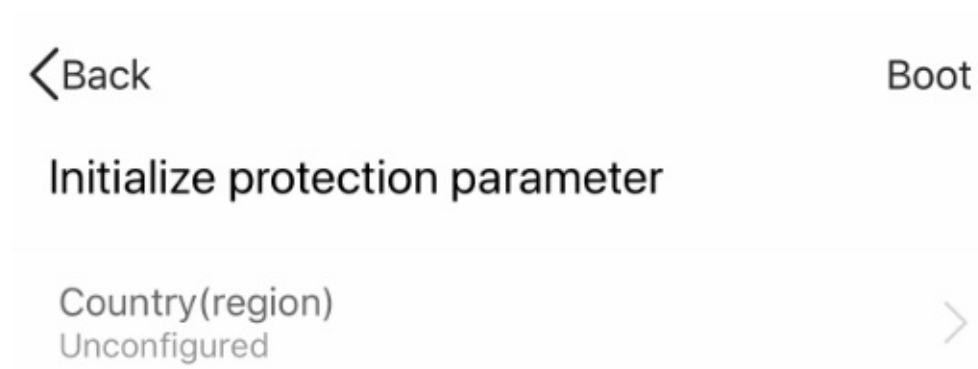


The parameter "Country (region)" must be set to the country (region) where the inverter is installed at. Other

9.You will enter the App home screen after finishing the initialization setting.

# Function Overview

## Function Overview


You can view inverter running state and power generation, to start/stop the inverter, and to change password, etc.

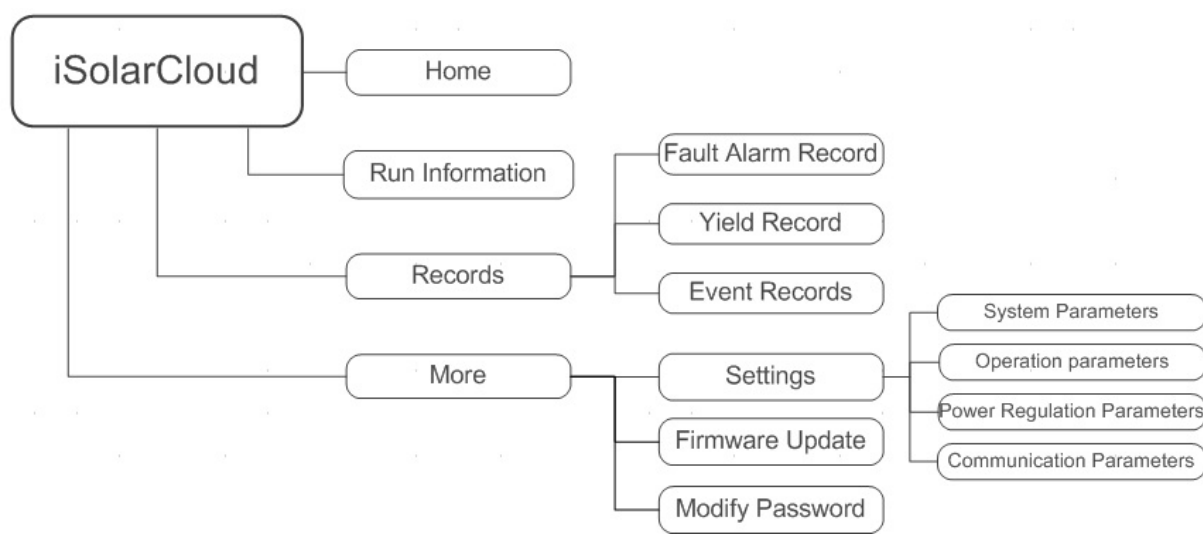

# Home

## Home

You will enter the home screen after login.

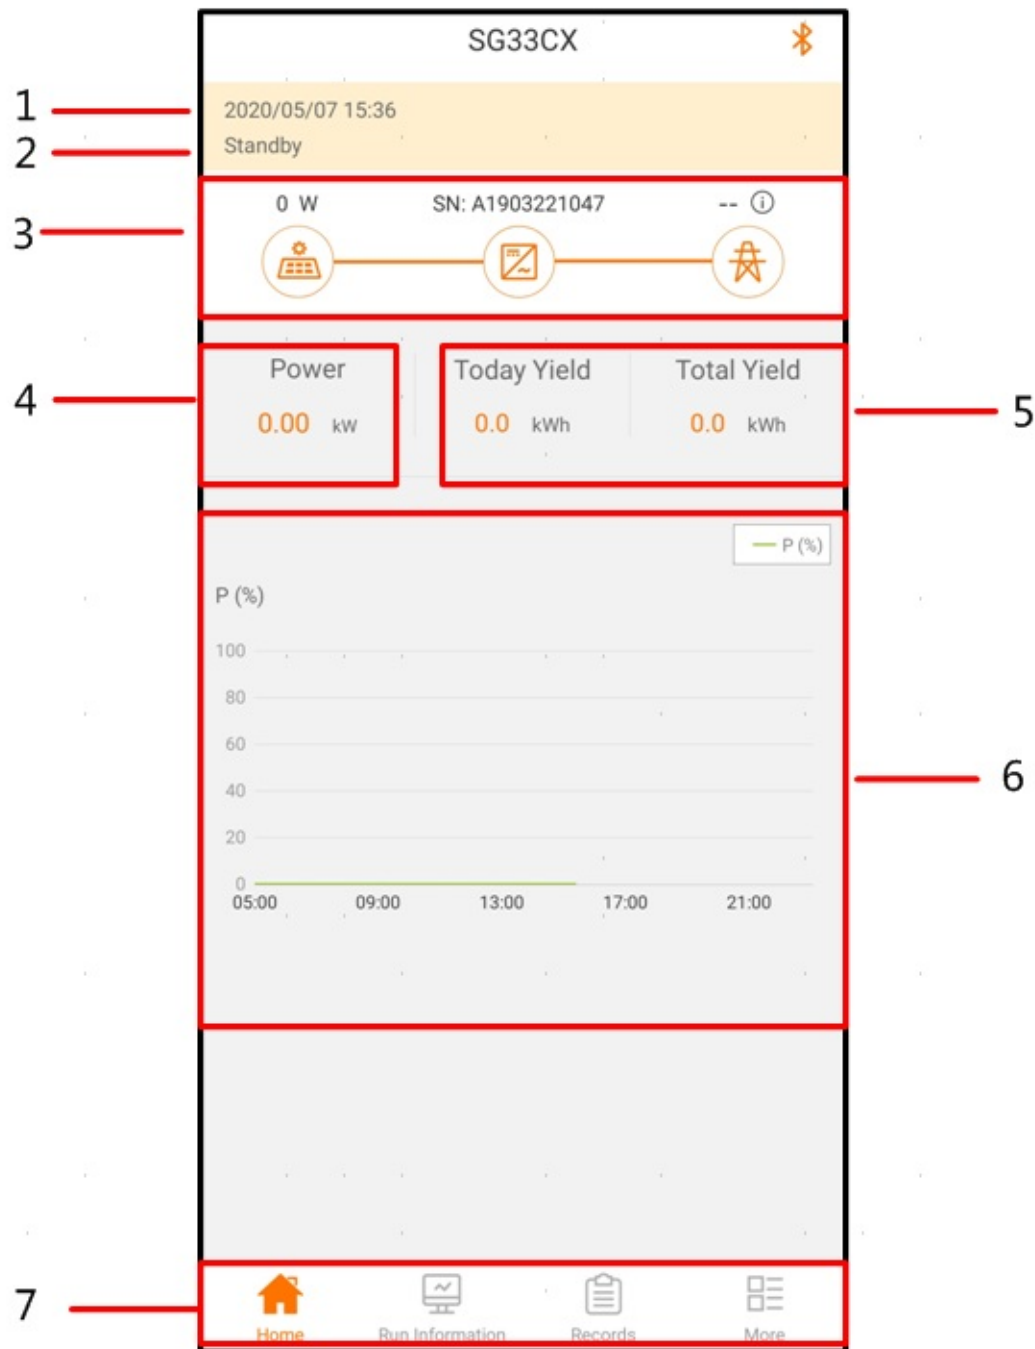


Function description of home screen

| No. | Name | Description |
|-----|------|-------------|
|-----|------|-------------|

|   |                  |   |
|---|------------------|---|
| 1 | Date and time    | The system date and time of the inverter  |
| 2 | Inverter state   | The current operating state of the inverter   |
| 3 | Power flow chart | Indicate the PV power generation power, feed-in power, etc. The line with an arrow indicates energy flow between connected devices, and the arrow pointing indicates energy flow direction. |
| 4 | Power            | Present output power of the inverter  |
| 5 | Power yield      | Today power yield and accumulative power yield of the inverter  |
| 6 | Power curve      | Curve showing change of power between 5 am and 23 pm every day.(Each point on the curve is the percentage of inverter current power to rated power)   |
| 7 | Navigation bar   | Including menus of “Home”, “Run Information”, “Records”, and “More”   |




If the inverter runs abnormally, the fault icon  appears in the lower right corner of the inverter icon on the power load chart. Users can tap the icon to view detailed fault information and corrective measures.

# Run Information

## Run Information

Tap “Run Information” on the navigation bar to enter the running information screen. Running information includes PV information, inverter information, input, output, and more.

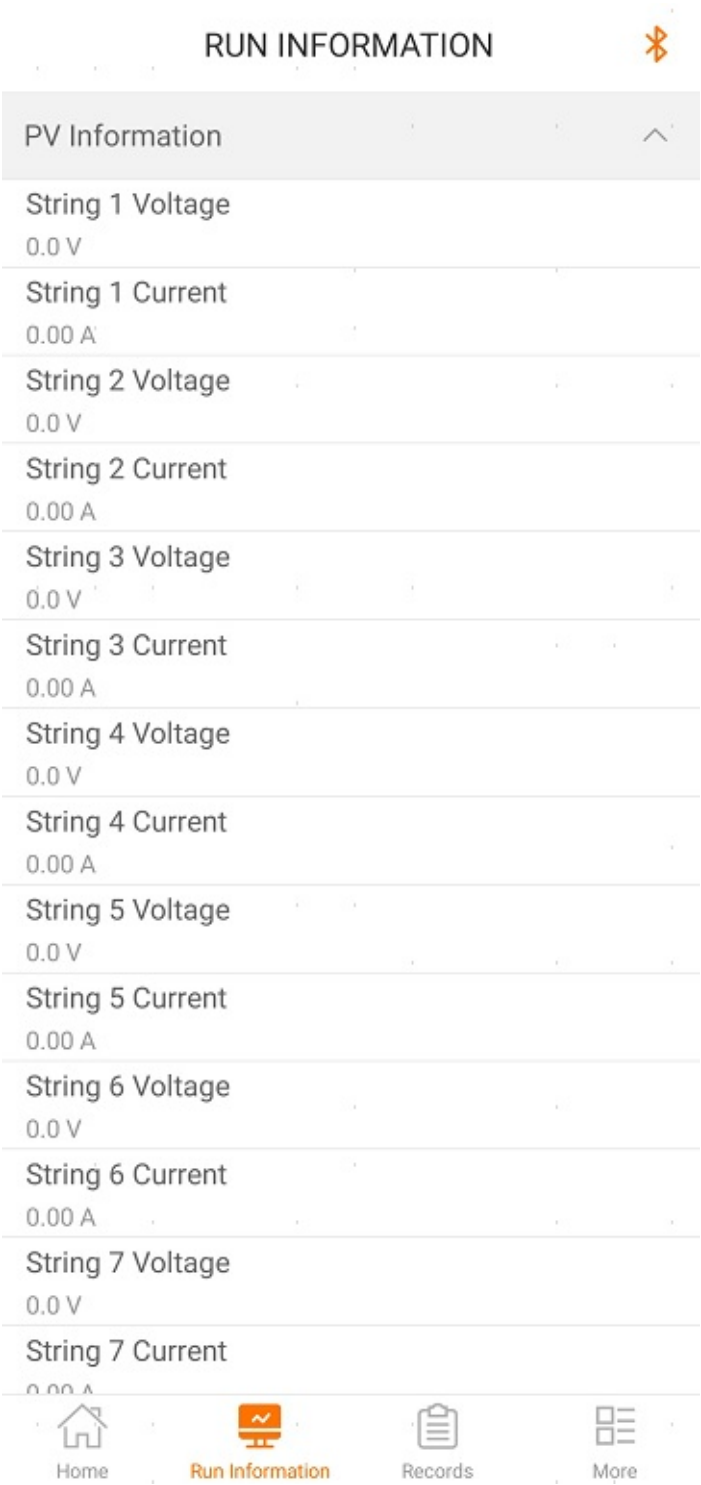





# Records

## Records


Tap “Records” on the navigation bar to enter the history record screen on which you can view alarm records, energy records and event record.

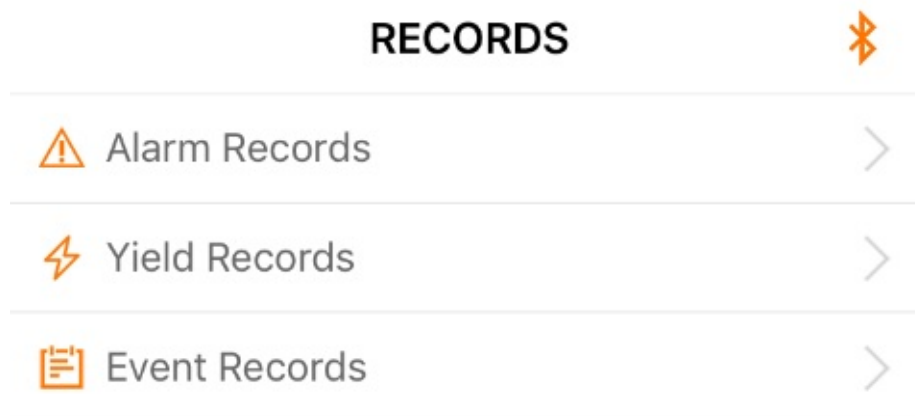


### Viewing alarm records

1. Tap “Fault Alarm Record” to enter the corresponding screen.
2. Tap the icon  to select a time segment and view records within this period.
3. Select a record and tap it to view detailed fault information, including alarm level, occurrence time, alarm ID, and repair advice.

### Viewing energy records

1. Tap “Yield Record” to enter the power curve screen.
2. Tap the time bar  2019-03-13 on the top of the screen to select a time segment and view the corresponding power curve.
3. Swipe the screen left to view daily power generation histogram, monthly power generation histogram and annual power generation histogram.

### Viewing event record

1. Tap “Event Records” to view the event record list.
2. Tap the icon  to select a time segment and view event records within this period.





# More

## More

Tap “More” to enter the corresponding screen, on which you can start or stop the machine, set parameters, firmware update and change password.

### Setting Parameter

1. Tap “Settings” to enter the parameter setting screen.
2. Set the following parameters if necessary.

| Parameter                   | Description  |
|-----------------------------|--|
| System Parameters           | Deliver a start or stop command to the inverter, set the date and time, and view the ARM and MDSP software versions. |
| Operation parameters        | Set running time and PID parameters.   |
| Power Regulation Parameters | Perform active power regulation or reactive power regulation on the inverter.  |
| Communication Parameters    | Set the device address.  |

### Firmware Update

This section describes how to upgrade inverter firmware.

#### Prerequisite

The user has the permission of upgrading firmware.

#### Procedure

1. Obtain the firmware upgrade package. See “Firmware Download” for details.
2. Click “More” -> “Local Access” -> “Bluetooth” on the remote terminal to log into the system. For details, please refer to “Login”.
3. Click “More” -> “Firmware Upgrade” in the navigation bar to enter the firmware upgrade interface.
4. Click the upgrade package file, a prompt box will pop up asking you to upgrade the firmware with

the file, click “Update Immediately” to perform the firmware upgrade.

5.Wait for the file to be uploaded. When the upgrade is finished, the interface will inform you of the upgrade completion. Click “Complete” to end the upgrade.

When the user has not copied the local upgrade package and remote download upgrade package, the upgrade packa

Click "Download Now" to jump to the "More" interface. Click "Firmware Download", follow the steps to complete

## Modify Password

1.Tap “Modify Password” to enter the corresponding screen.

2.Enter new password and tap “Confirm” to finish changing the password, where the new password must consist of 8 - 20 characters, a combination of letters and digits.

## Appendix

## Appendix

---

# Manual Description

## Manual Description

---

The information contained in this document is the property of Sungrow Power Supply Co., Ltd. (referred to as “SUNGROW” hereinafter). Publishing its content, either partially or in full, requires the written permission of SUNGROW. Any internal company copying of the document for the purposes of evaluating the product or its correct implementation is allowed and does not require permission.

All rights reserved including the pictures, symbols, and identifiers used in this manual. Any reproduction or disclosure, even partially, of the contents of this manual is strictly prohibited without prior written authorization of SUNGROW.

The content of the manual will be periodically updated or revised as per the product development. It is probably that there are changes in manuals for the subsequent module edition.

# Contact Information

## Contact Information

Should you have any question about this product, please contact us.

|  |   |
|--|---|
| China (HQ)<br>Sungrow Power Supply Co., Ltd<br>Hefei<br>+86 551 65327834<br>service@sungrowpower.com   | Australia<br>Sungrow Australia Group Pty. Ltd.<br>Sydney<br>+61 2 9922 1522<br>service@sungrowpower.com.au        |
| Brazil<br>Sungrow Do Brasil<br>Sao Paulo<br>+55 0800 677 6000<br>latam.service@sungrowamericas.com     | France<br>Sungrow France – Siege Social<br>Paris<br>-<br>service.france@sungrow.co                                |
| Germany<br>Sungrow Deutschland GmbH<br>München<br>+49 89 324 914 761<br>service.germany@sungrow.co     | Greece<br>Service Partner – Survey Digital<br>-<br>+30 2106044212<br>service.greece@sungrow.co                    |
| India<br>Sungrow (India) Private Limited<br>Gurgaon<br>+91 080 41201350<br>service@in.sungrowpower.com | Italy<br>Sungrow Italy<br>Milano<br>-<br>service.italy@sungrow.co   |
| Japan<br>Sungrow Japan K.K.<br>Tokyo<br>+81 3 6262 9917<br>japanservice@jp.sungrowpower.com            | Korea<br>Sungrow Power Korea Limited<br>Seoul<br>+82 70 7719 1889<br>service@kr.sungrowpower.com                  |
| Malaysia<br>Sungrow SEA<br>Selangor Darul Ehsan<br>+60 19 897 3360<br>service@my.sungrowpower.com      | Philippines<br>Sungrow Power Supply Co., Ltd<br>Mandaluyong City<br>+63 9173022769<br>service@ph.sungrowpower.com |
| Thailand<br>Sungrow Thailand Co., Ltd.   | Spain<br>Sungrow Ibérica S.L.U.   |

|   |  |
|---|--|
| <p>Bangkok<br/>+66 891246053<br/>service@th.sungrowpower.com</p>  | <p>Sungrow Ibérica S.L.U.<br/>Navarra<br/>service.spain@sungrow.co</p>   |
| <p>Romania<br/>Service Partner - Elerex<br/>-<br/>+40 241762250<br/>service.romania@sungrow.co</p>      | <p>Turkey<br/>Sungrow Deutschland GmbH Turkey Istanbul<br/>Representative Bureau<br/>Istanbul<br/>+90 212 731 8883<br/>service.turkey@sungrow.co</p> |
| <p>UK<br/>Sungrow Power UK Ltd.<br/>Milton Keynes<br/>+44 (0) 0908 414127<br/>service.uk@sungrow.co</p> | <p>U.S.A , Mexico<br/>Sungrow USA Corporation<br/>Phoenix Arizona<br/>+1 833 747 6937<br/>techsupport@sungrow-na.com</p>                             |